



GUANGDONG ROSERY BATH SCIENCE AND TECHNOLOGY CO., LTD.

www.roserybath.com Tel: +86-760-88407903 Fax: +86-760-88407903

SHOWER DOOR

ABOUT ROSERY

Guangdong Rosery Bath Science and Technology Co., Ltd. was founded in the 1990s. We are a shower door company integrating R&D, design, production and sales. The company has an intelligent manufacturing base of 240,000 square meters in Taishan, China, which has intelligent production lines for glass, hardware, aluminum, shower door, shower tray, bathtub, wash basin, Mirror, shower cabinets, etc.

ROSERY has passed the ISO9001 certification, ISO14001 certification and ISO45001 certification.

Now, ROSERY business forms a tripod layout of export, domestic franchising, and projects. For export, our products are exported to more than 30 countries and regions such as America, Canada, UK, France and Australia, etc. For domestic channel, ROSERY has close to 1,000 shops spanning across more than 600 cities in China, and establishes deep cooperation with national home furnishing chain stores. For projects, ROSERY established strategic cooperation with top real estate developers.


ROSERY walked through more than twenty years, keep moving and never stop.

We embrace future with love, chase our dream with customers.

Taishan Intelligent Manufacturing Base

Covers an area of **240,000m²**



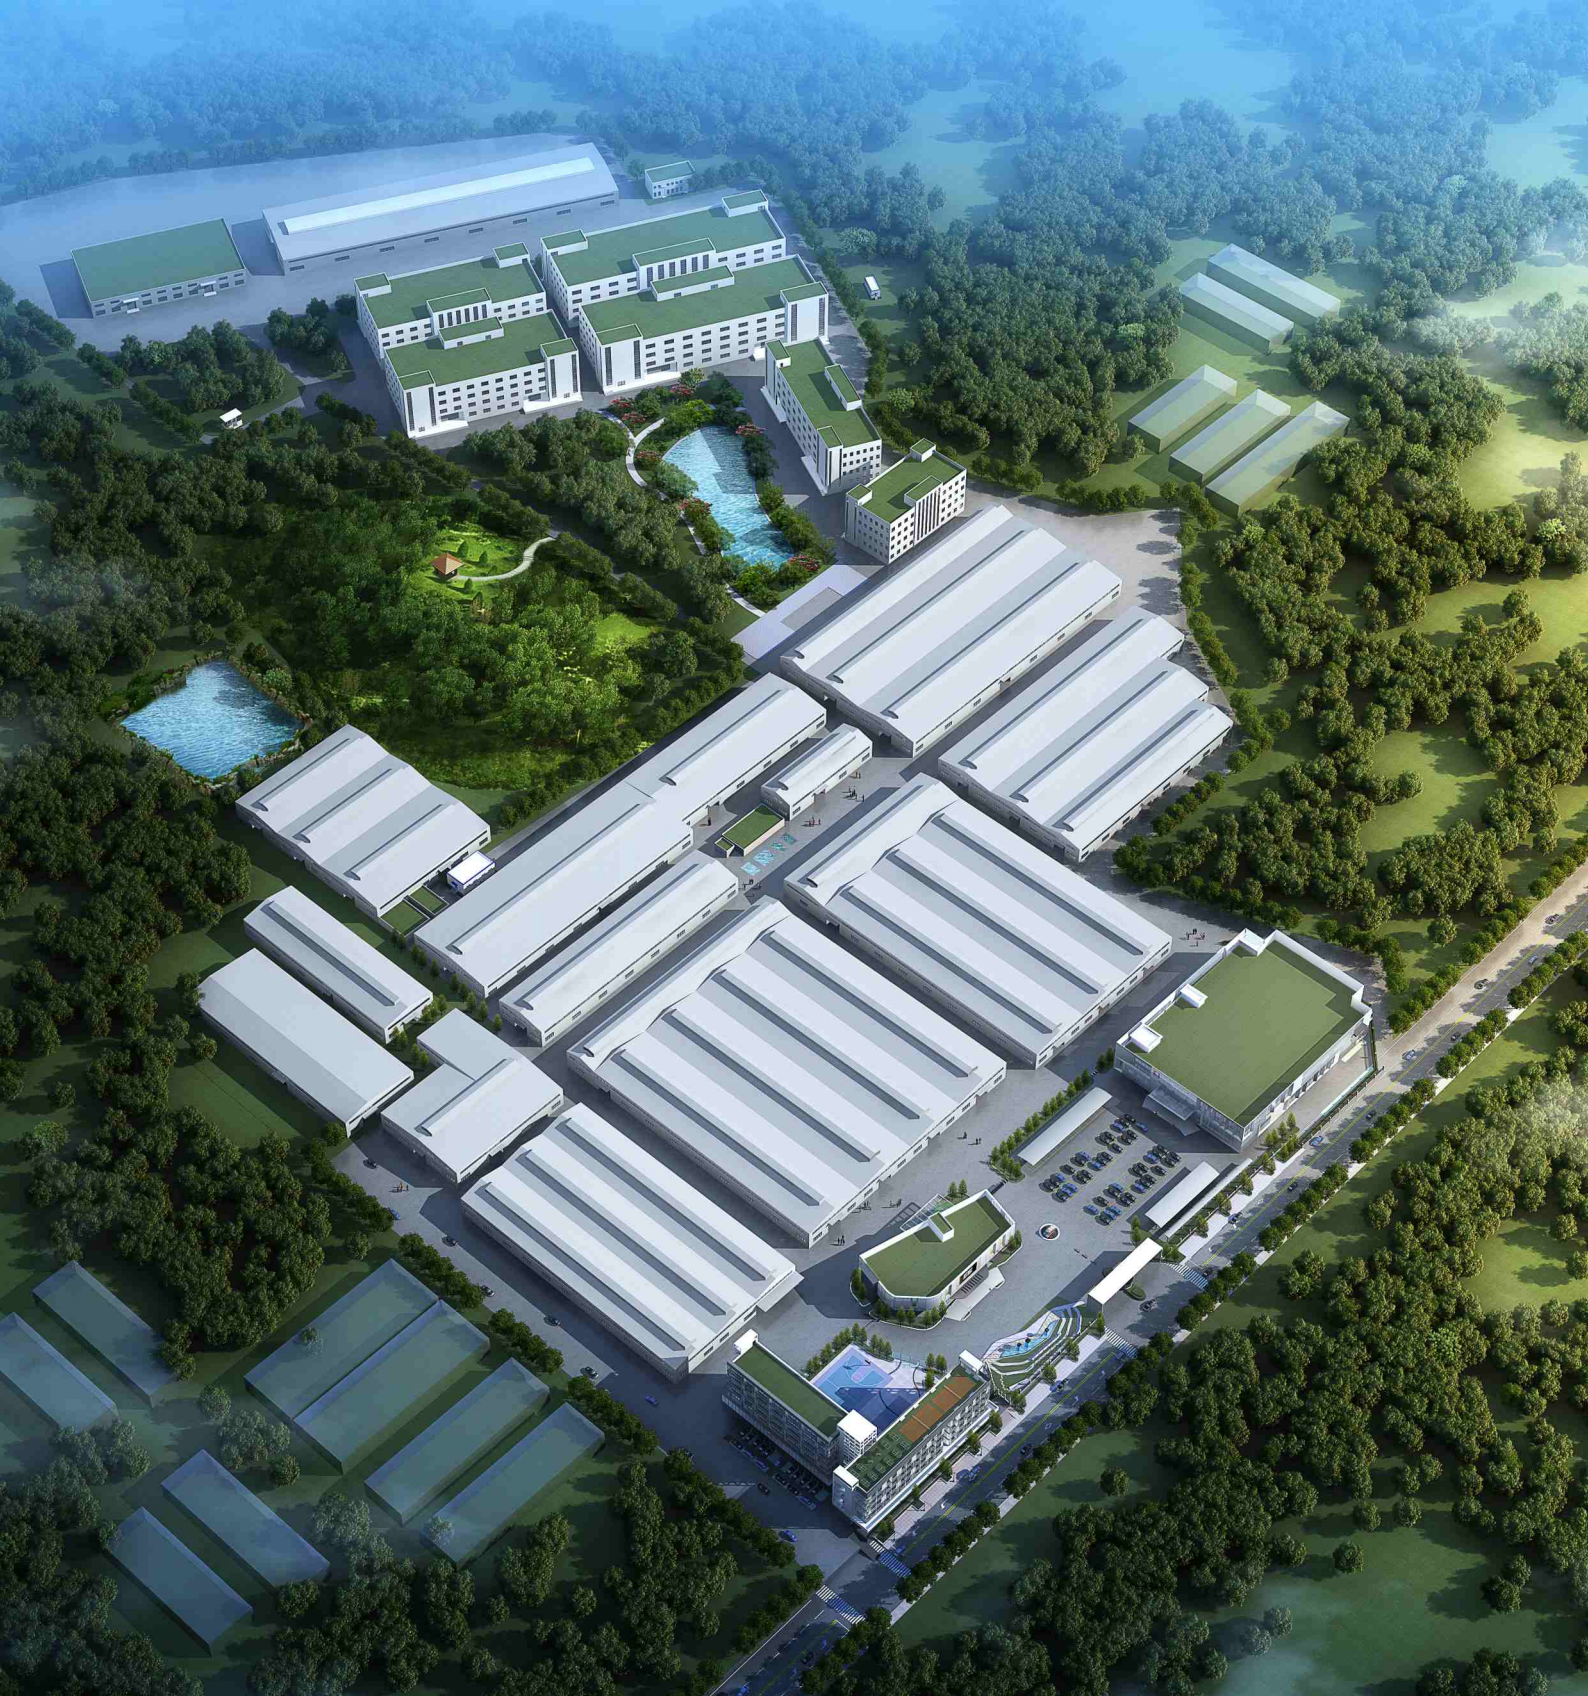

WELCOME TO
TAISHAN PRODUCTION BASE

Shower door production line
SMART MANUFACTURING



**MAIN MATERIAL
PROCESSING**



Stable Material Supply

We are the pioneer to make aluminium, glass and hardware by ourselves in the industry.

**INTELLIGENT SHOWER DOOR
PRODUCTION LINE**



High Production Efficiency

Robotic arms in production line, precise and efficient.


**INTERTEK CERTIFIED
LABORATORY**



Professional R&D Team

All the engineers have more than 5 years of shower door industry experience.


QUALIFICATIONS

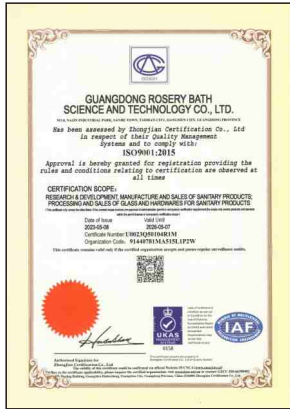

ISO9001 International Quality System Certification



ISO14001 International Environmental System Certification

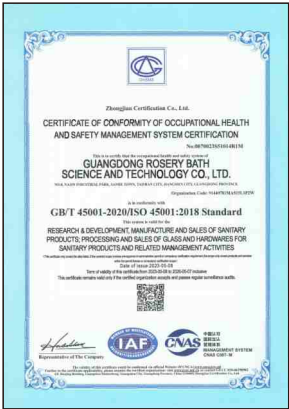

ISO45001 International Occupational Health and Safety Management System Certification



CUPC Certificate



CE Certificate



FSC Certificate

The 3rd Testing Party Intertek has assessed Rosery laboratory and confirmed it complies with EN14428:2015 standard.

Rosery is the first shower enclosure company to be approved as an Intertek Satellite laboratory in China.

HONORS



GERMANY RED DOT AWARD




GERMANY IF DESIGN AWARD



MUSE DESIGN AWARDS



Kapok China Design Award

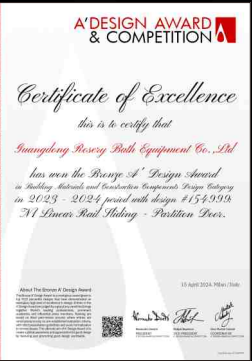


A'DESIGN AWARD


CONTENTS

15	AEN Series	Aluminium frame	67	DE Series	NEW	Aluminium frame
23	AY Series	Aluminium frame	69	DH Series	NEW	Aluminium frame
33	BQ Series	FAST INSTALLATION Aluminium frame	71	DV Series	NEW	Stainless steel frame
43	CG Series	Aluminium frame	77	EG Series	NEW	Aluminium frame
47	CI Series	SUS304 Top bar, Aluminium wall profile	81	EH Series	NEW	Aluminium frame
51	CQ Series	NEW Stainless steel frame	83	PB Series		Aluminium frame
59	CU Series	NEW SUS304 Top bar, Aluminium wall profile	85	PF Series		Aluminium frame
63	CV Series	Aluminium frame	87	PH Series		Aluminium frame
65	DC Series	Aluminium frame or Stainless steel frame	91	PN Series		Aluminium frame
			93	VX Series		Aluminium frame

Glass color

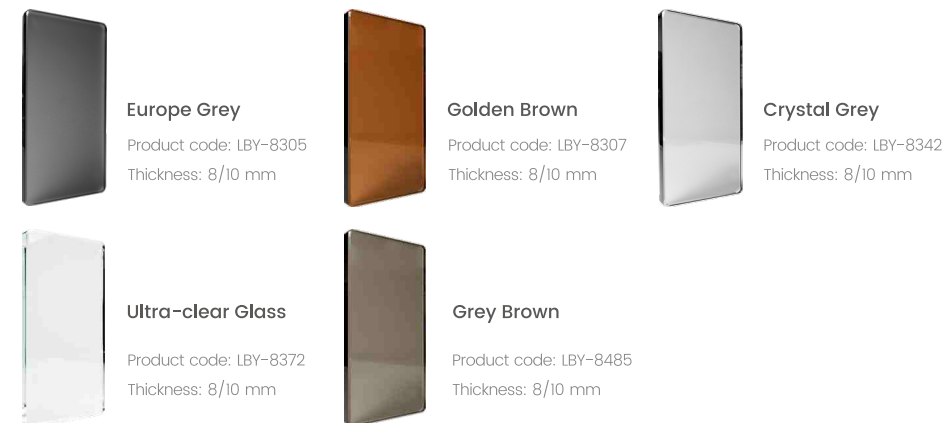


Laminated glass

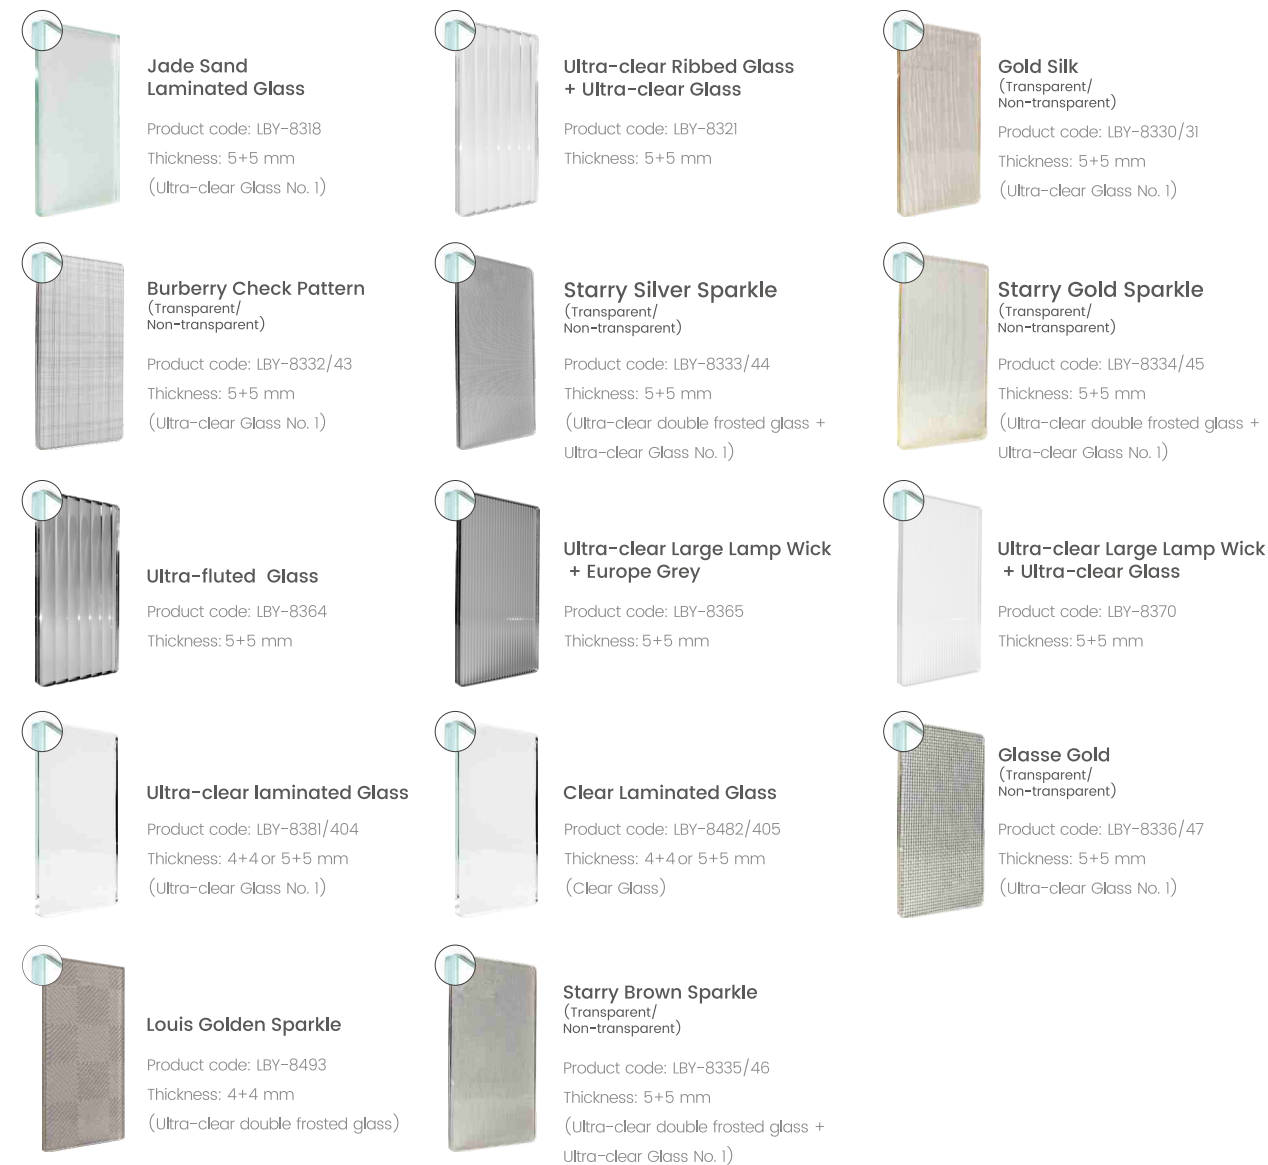


Craft glass




Patterned glass

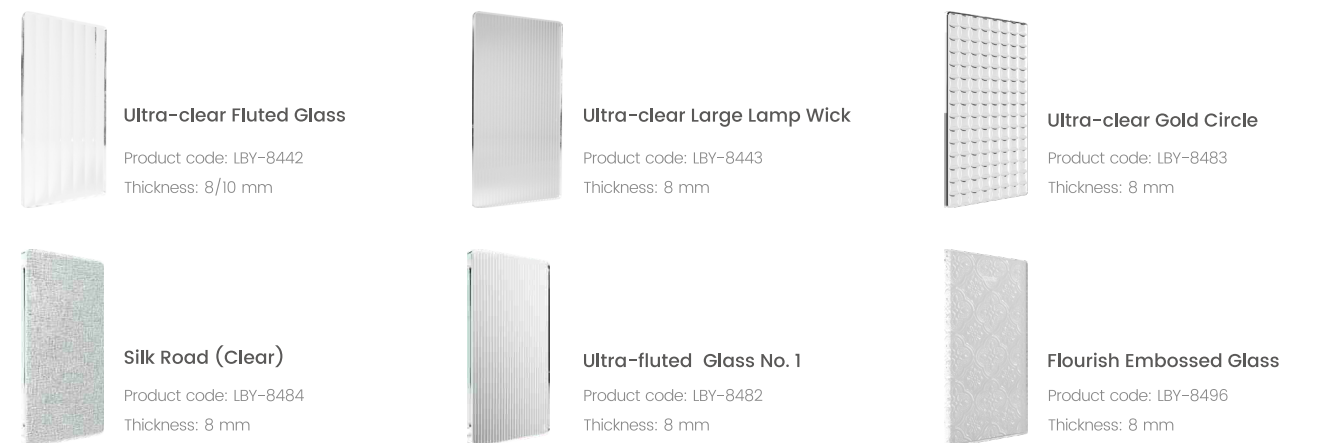


Colored laminated glass

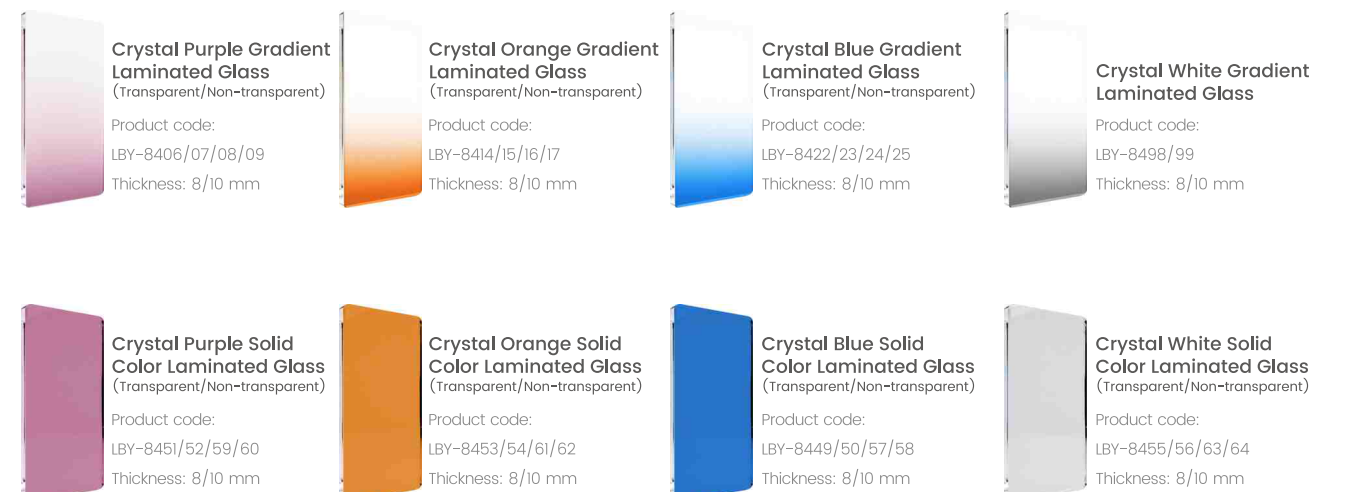

Shower door handles




Product code: LS-8001
Size: Ø25 (Hole distance 275/375/475)
Material: Stainless steel




Product code: LS-8005
Size: 300* (400/500)
Material: Stainless steel




Product code: LS-8015
Size: Ø19 (Hole distance 144)
Material: Stainless steel




Product code: LS-8112
Size: 25×13 (Hole distance 300)
Material: Stainless steel




Product code: LS-8121
Size: Hole distance 144
Material: ABS



Product code: LS-8210
Size: Hole distance 145
Material: Zinc




Product code: LS-8129
Size: 225/300
Material: SUS304




Product code: LS-8069
Size: Ø19 (Hole distance 150)
Material: Stainless steel




Product code: LS-8063
Size: Hole distance 380
Material: Zinc




Product code: LS-8070
Size: 11×22 (Hole distance 300)
Material: Zinc




Product code: LS-8211
Size: Hole distance 145
Material: Zinc




Product code: LS-8151
Size: 170
Material: Zinc




Product code: LS-8152
Size: 45 x 20
Material: Zinc




Product code: LS-8164
Size: Hole distance 200
Material: Zinc




Product code: LS-8110
Size: 300/320
Material: Stainless steel




Product code: LS-8073
Size : Hole distance 57
Material: Stainless steel




Product code: LS-8047
Size: Hole distance 475 (Can be customized)
Material: Zinc + Aluminum

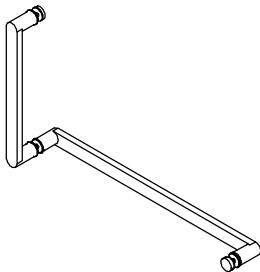

Product code: LS-8157
Size: 450/250
Material: SUS304

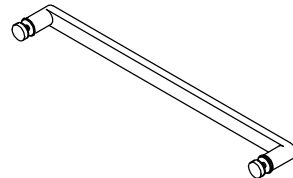


Product code: LS-8111
Size: Hole distance 400/500
Material: SUS304



Product code: LS-8217
Size: Hole distance 450/550/650
Material: SUS304

PATENT CERTIFICATE NUMBER

 ZL202330208208.2
ZL202122258613.3

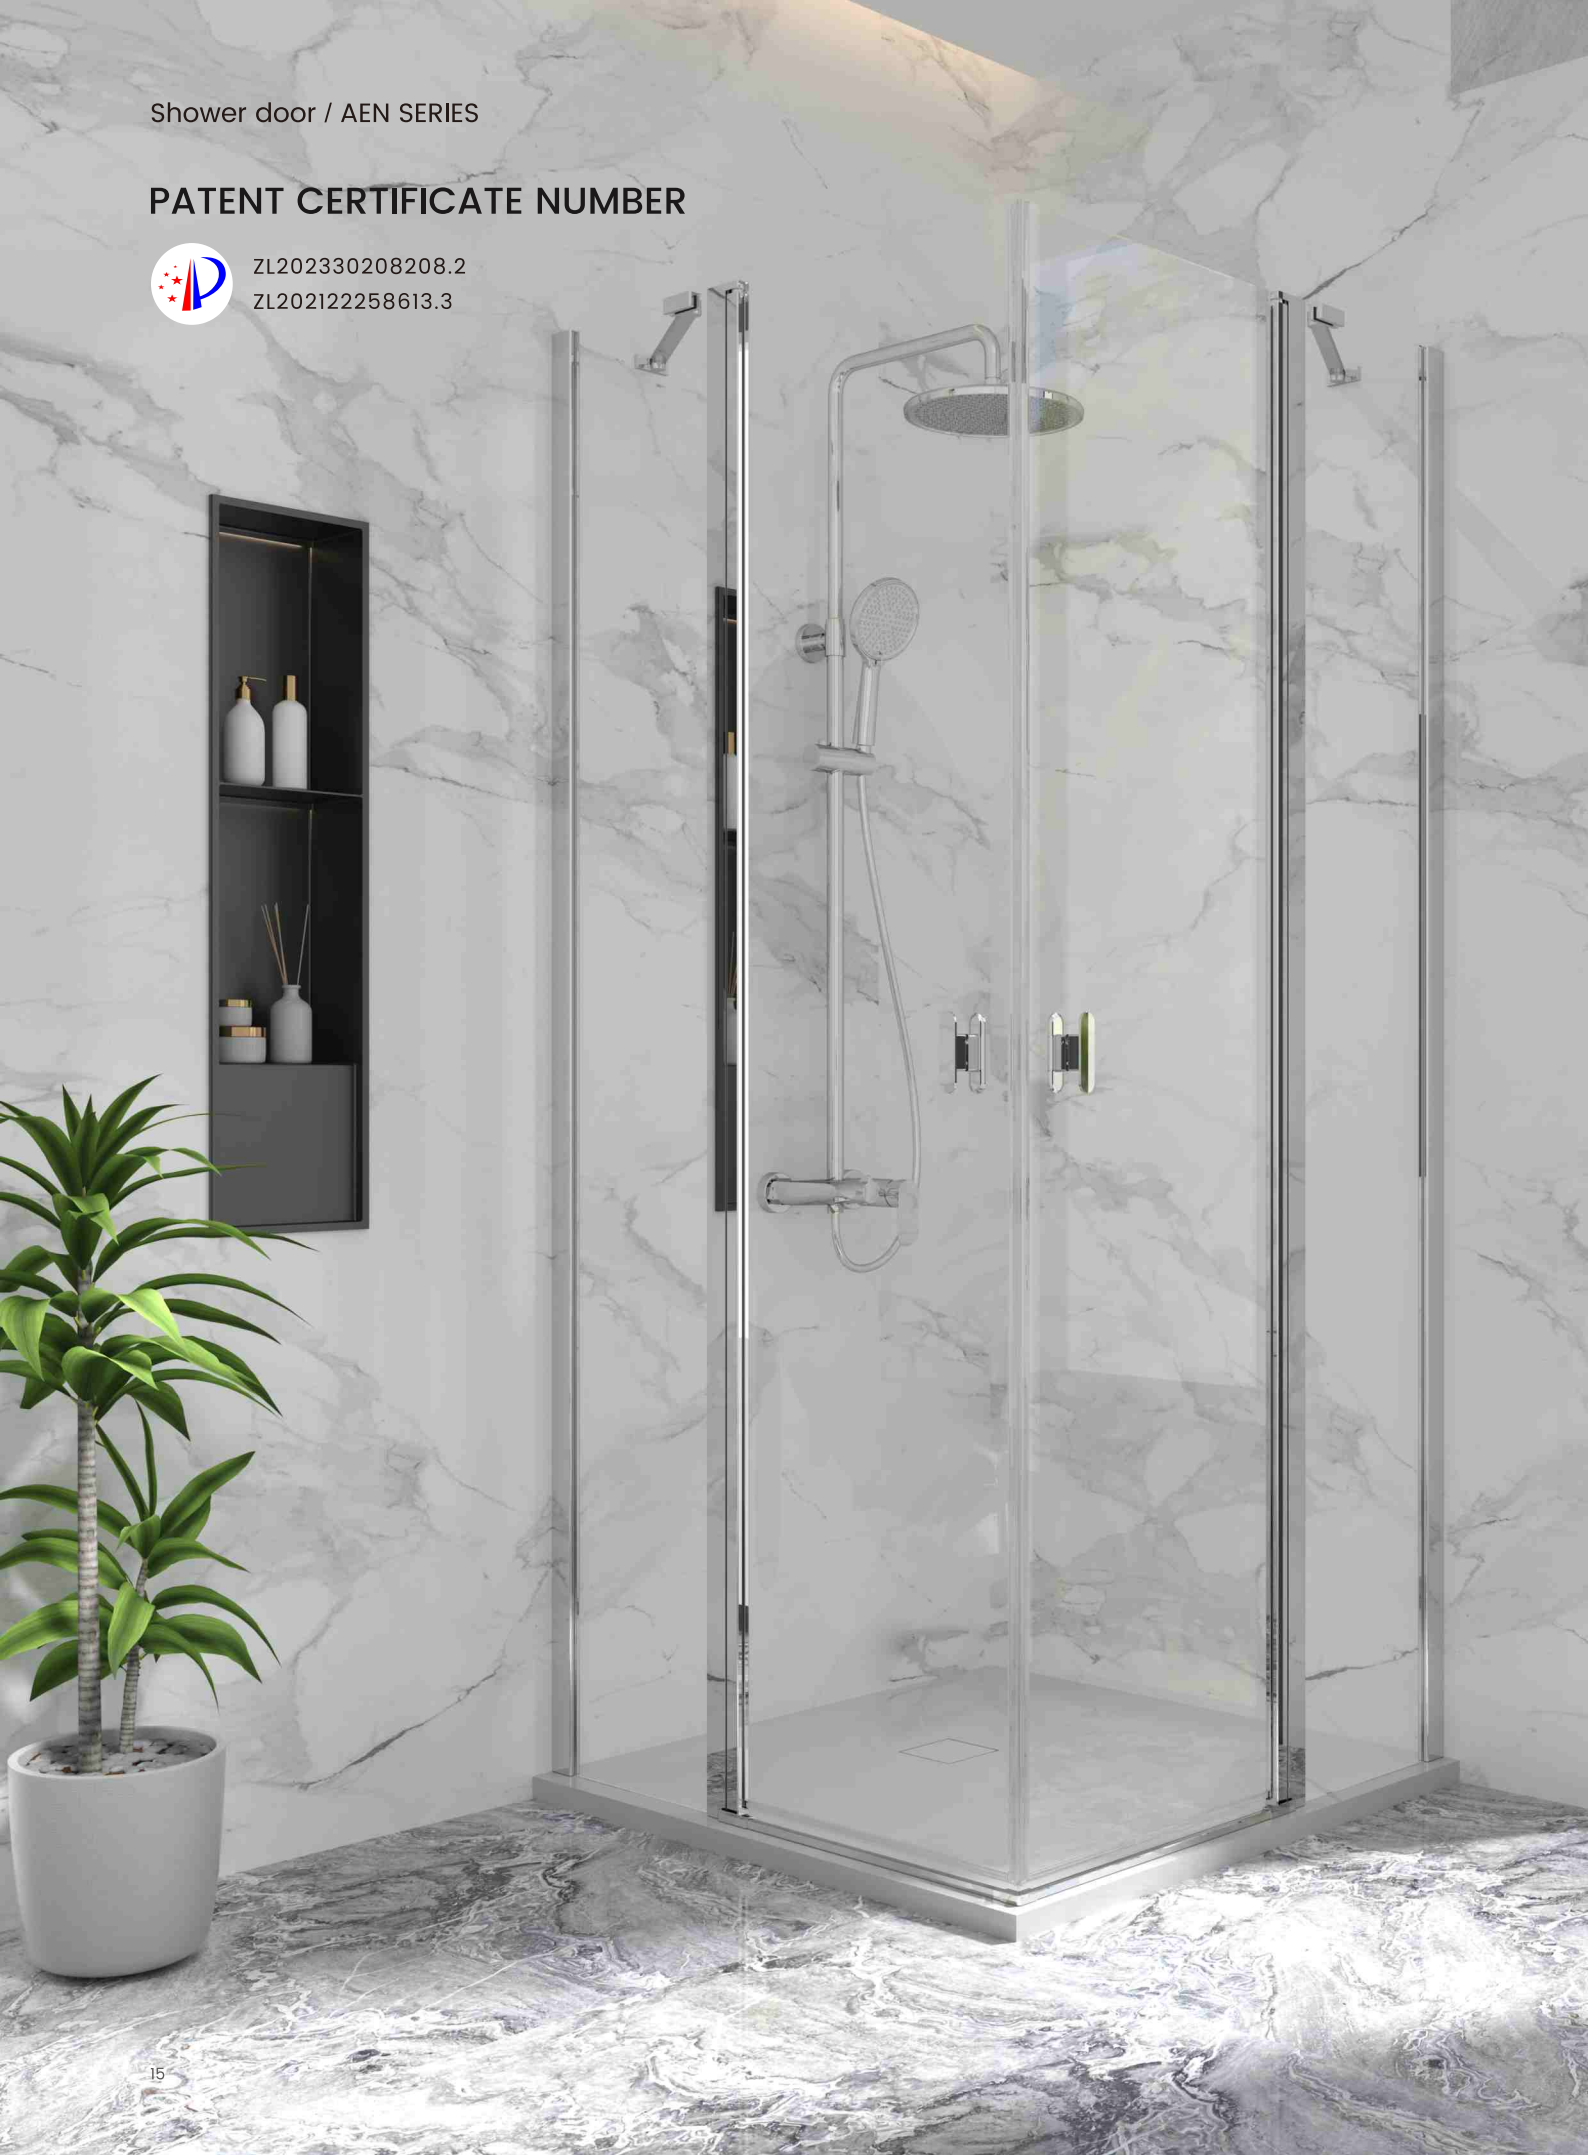

FRAME MATERIAL: Aluminum

FRAME COLORS


-  Bright silver
-  Gold
-  Flaxen
-  Matte black
-  White
-  Brushed gold
-  Brushed nickel
-  Brushed grey



Pivot structure



Support bar

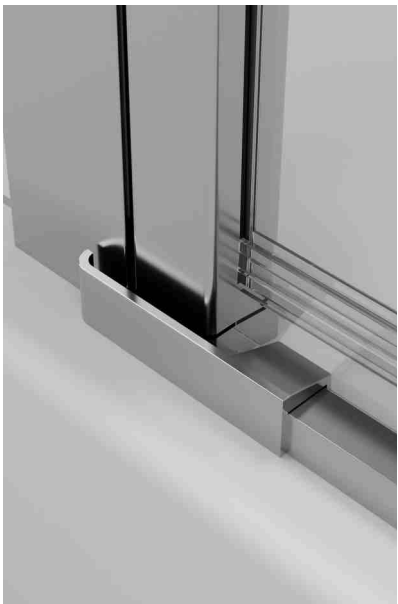

Door bottom
water-blocking system


-  GLASS THICKNESS
-  HEIGHT 2000MM
-  PRODUCT ADJUSTMENT
-  REVERSIBLE FOR LEFT OR RIGHT
-  ALL SCREWS ARE HIDDEN
-  MAGNETIC CLOSURE

*Other handles are available. For more information, please see page 13.




AEN-P711

Width B	Product code	Adjustment min-max B	Door opening C
700	AEN-P711-A	680-700	610
760	AEN-P711-B	740-760	650
800	AEN-P711-C	780-800	710
900	AEN-P711-D	880-900	810



AEN-P721

Width B	Product code	Adjustment min-max B	Door opening C
900	AEN-P721-A	880-900	650
1000	AEN-P721-B	980-1000	650
1200	AEN-P721-C	1180-1200	650
1400	AEN-P721-D	1390-1400	650






AEN - SP

	Width B	Product code	Adjustment min-max B
	700	AEN-SP-A	670-690
	760	AEN-SP-B	730-750
	800	AEN-SP-C	770-790
	900	AEN-SP-D	870-890
	1000	AEN-SP-E	970-990




AEN-P442

Width B1/B2	Product code	Adjustment min-max B1/B2	Door opening C
800 / 800	AEN-P442-A	780-790 / 780-790	680
900 / 900	AEN-P442-B	870-890 / 870-890	680
1000 / 1000	AEN-P442-C	970-990 / 970-990	680



AEN - P142

Width B1/B2	Product code	Adjustment min-max B1/B2	Door opening C
800 / 800	AEN-P142-A	770-790 / 770-790	760
900 / 900	AEN-P142-B	870-890 / 870-890	760
1000 / 1000	AEN-P142-C	970-990 / 970-990	760



**FAST
INSTALLATION**

FRAME MATERIAL: Aluminum

FRAME COLORS



Bright silver



Gold



Flaxen



Matte black



Brushed gold




Brushed nickel



Brushed grey




Hanging clamp detail image

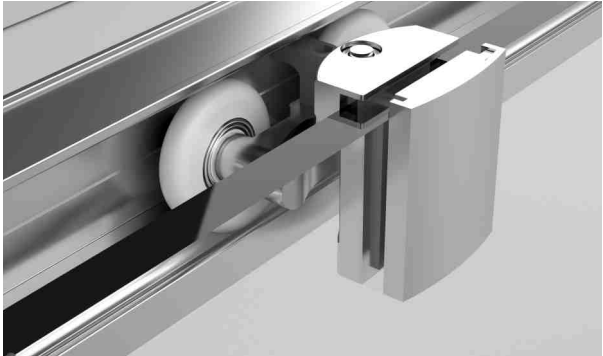

Roller detail image



Hanging clamp detail image

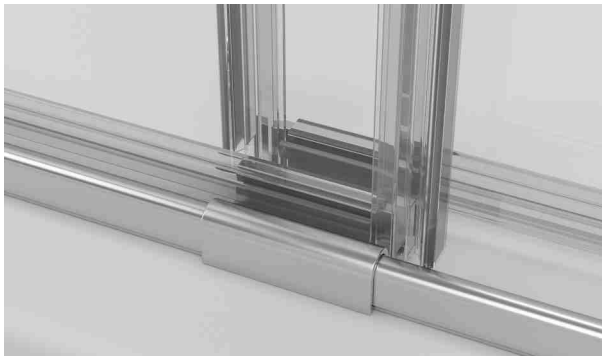

S722 door bottom guide detail image



GLASS
THICKNESS



HEIGHT
2000MM



PRODUCT
ADJUSTMENT



REVERSIBLE FOR
LEFT OR RIGHT




ALL SCREWS
ARE HIDDEN




FAST
INSTALLATION

*Other handles are available. For more information, please see page 13.

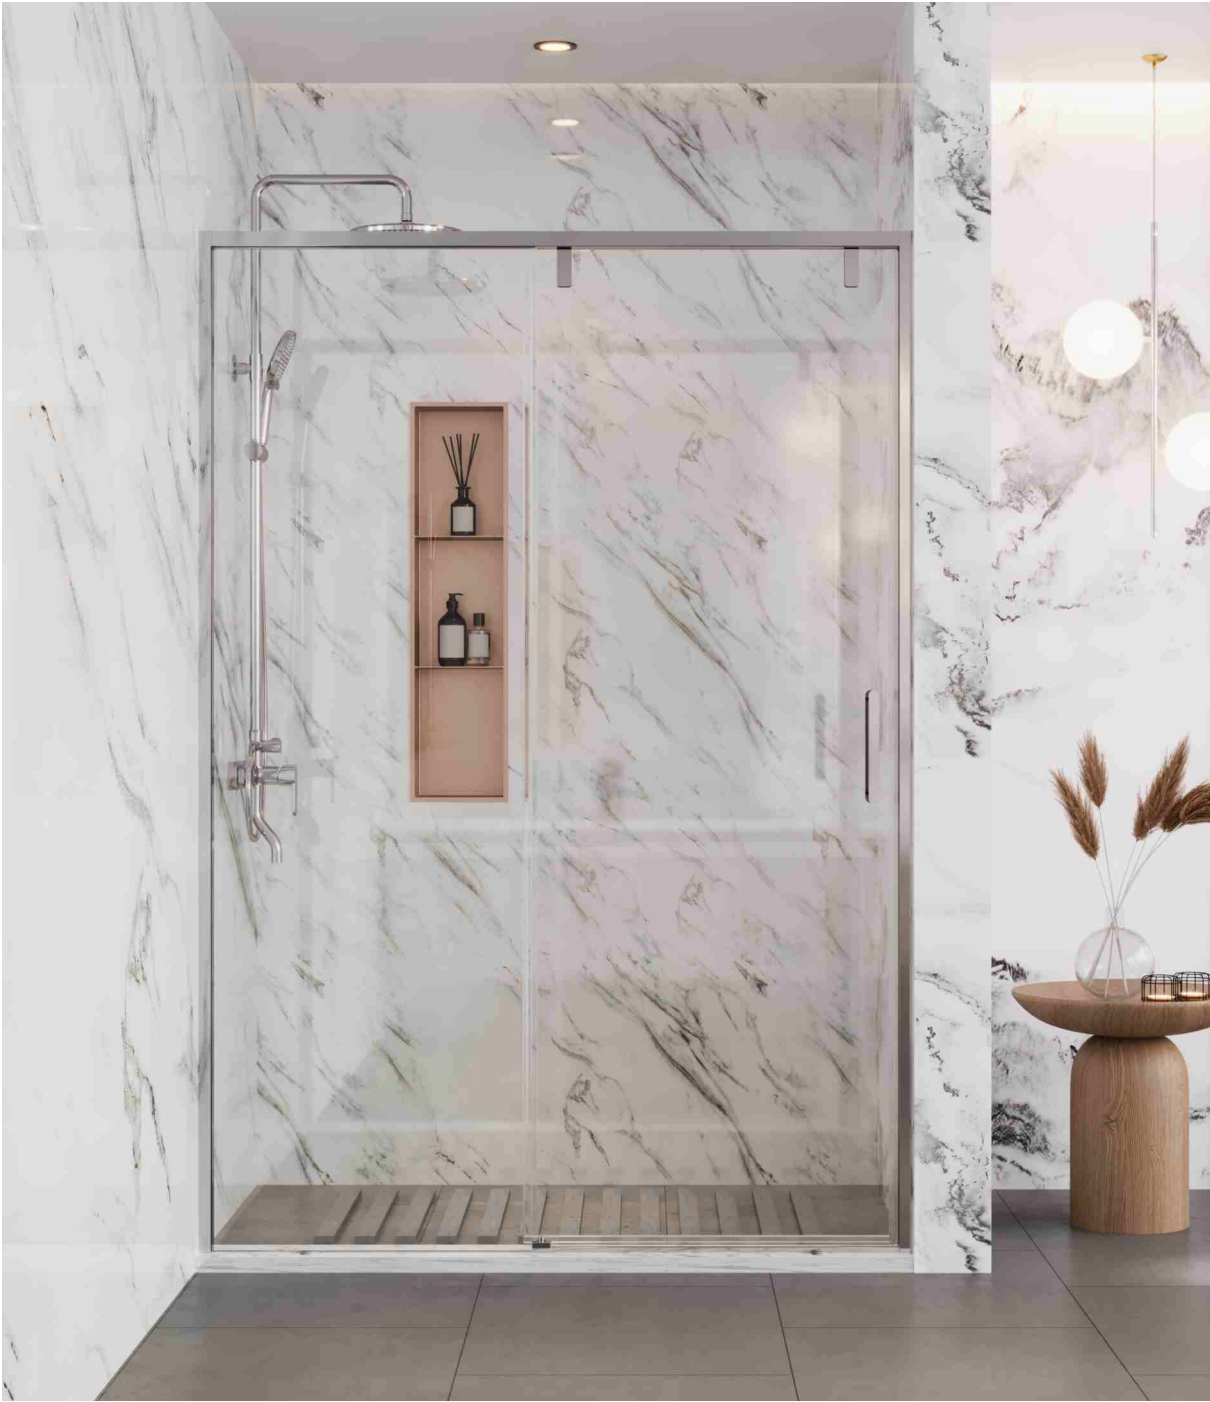

AY1-S721


Width B	Product code	Adjustment min-max B	Door opening C
900	AY1-S721-A	880-900	450
1000	AY1-S721-B	980-1000	450
1100	AY1-S721-C	1080-1100	450
1200	AY1-S721-D	1180-1200	500
1400	AY1-S721-E	1380-1400	600
1500	AY1-S721-F	1480-1500	650
1600	AY1-S721-G	1580-1600	700
1700	AY1-S721-H	1680-1700	750



*AY2-S722 magnetic door closure for better waterproof performance.

AY2-S722


Width B	Product code	Adjustment min-max B	Door opening C
48"(1219mm)	AY2-S722-A	1143-1219	489-565
60"(1524mm)	AY2-S722-B	1448-1524	639-715






AY1/AY2-SP


Width B	Product code	Adjustment min-max B
700	AY1/AY2-SP-A	680-700
760	AY1/AY2-SP-B	740-760
800	AY1/AY2-SP-C	780-800
900	AY1/AY2-SP-D	880-900
1000	AY1/AY2-SP-E	980-1000





AY4-S442


Width B1/B2	Product code	Adjustment min-max B1/B2	Door opening C
760 / 900	AY4-S442-A	745-760/885-900	550
800 / 800	AY4-S442-B	785-800/785-800	550
900 / 900	AY4-S442-C	885-900/885-900	550
1000 / 1000	AY4-S442-D	985-1000/985-1000	550
800 / 1000	AY4-S422-E	785-1000/785-1000	550
800 / 1200	AY4-S422-F	785-1200/785-1200	550
900 / 1200	AY4-S422-G	885-1200/885-1200	550



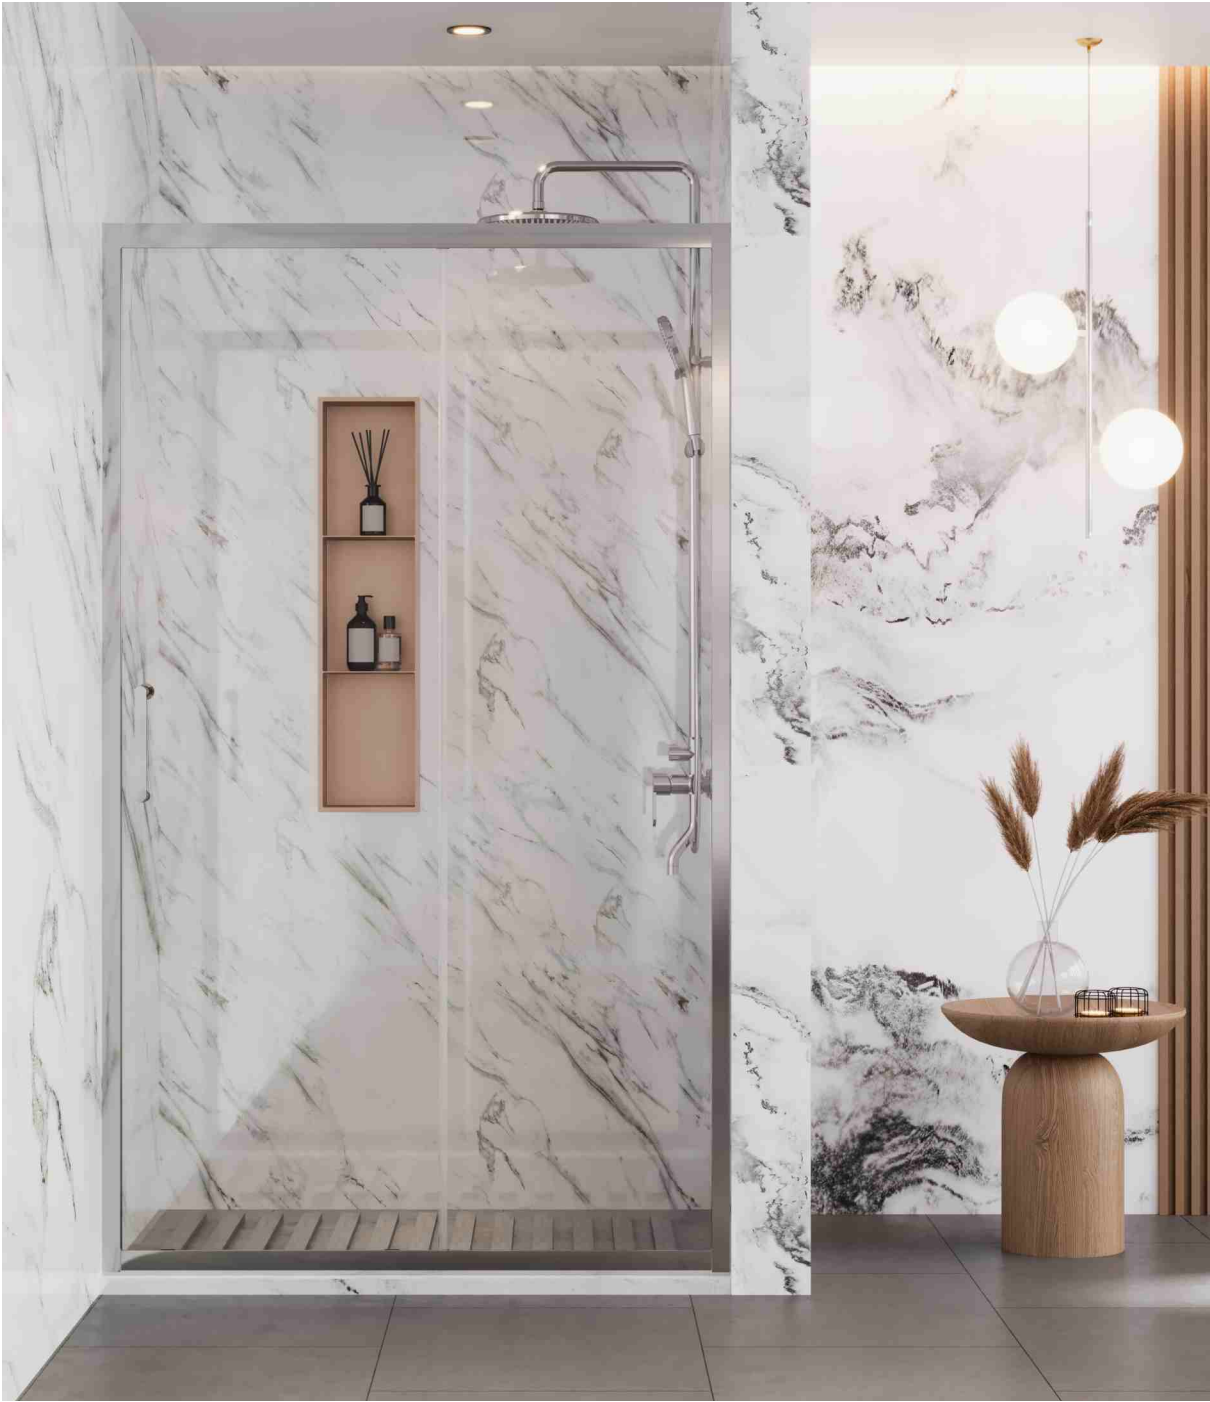

AY4-S721				
Width B	Product code	Adjustment min-max B	Door opening C	
900	AY4-S721-A	880-900	450	
1000	AY4-S721-B	980-1000	450	
1100	AY4-S721-C	1080-1100	450	
1200	AY4-S721-D	1180-1200	500	
1400	AY4-S721-E	1380-1400	600	
1500	AY4-S721-F	1480-1500	650	
1600	AY4-S721-G	1580-1600	700	
1700	AY4-S721-H	1680-1700	750	


AY4-SP			
Width B	Product code	Adjustment min-max B	
700	AY4-SP-A	680-700	
760	AY4-SP-B	740-760	
800	AY4-SP-C	780-800	
900	AY4-SP-D	880-900	
1000	AY4-SP-E	980-1000	

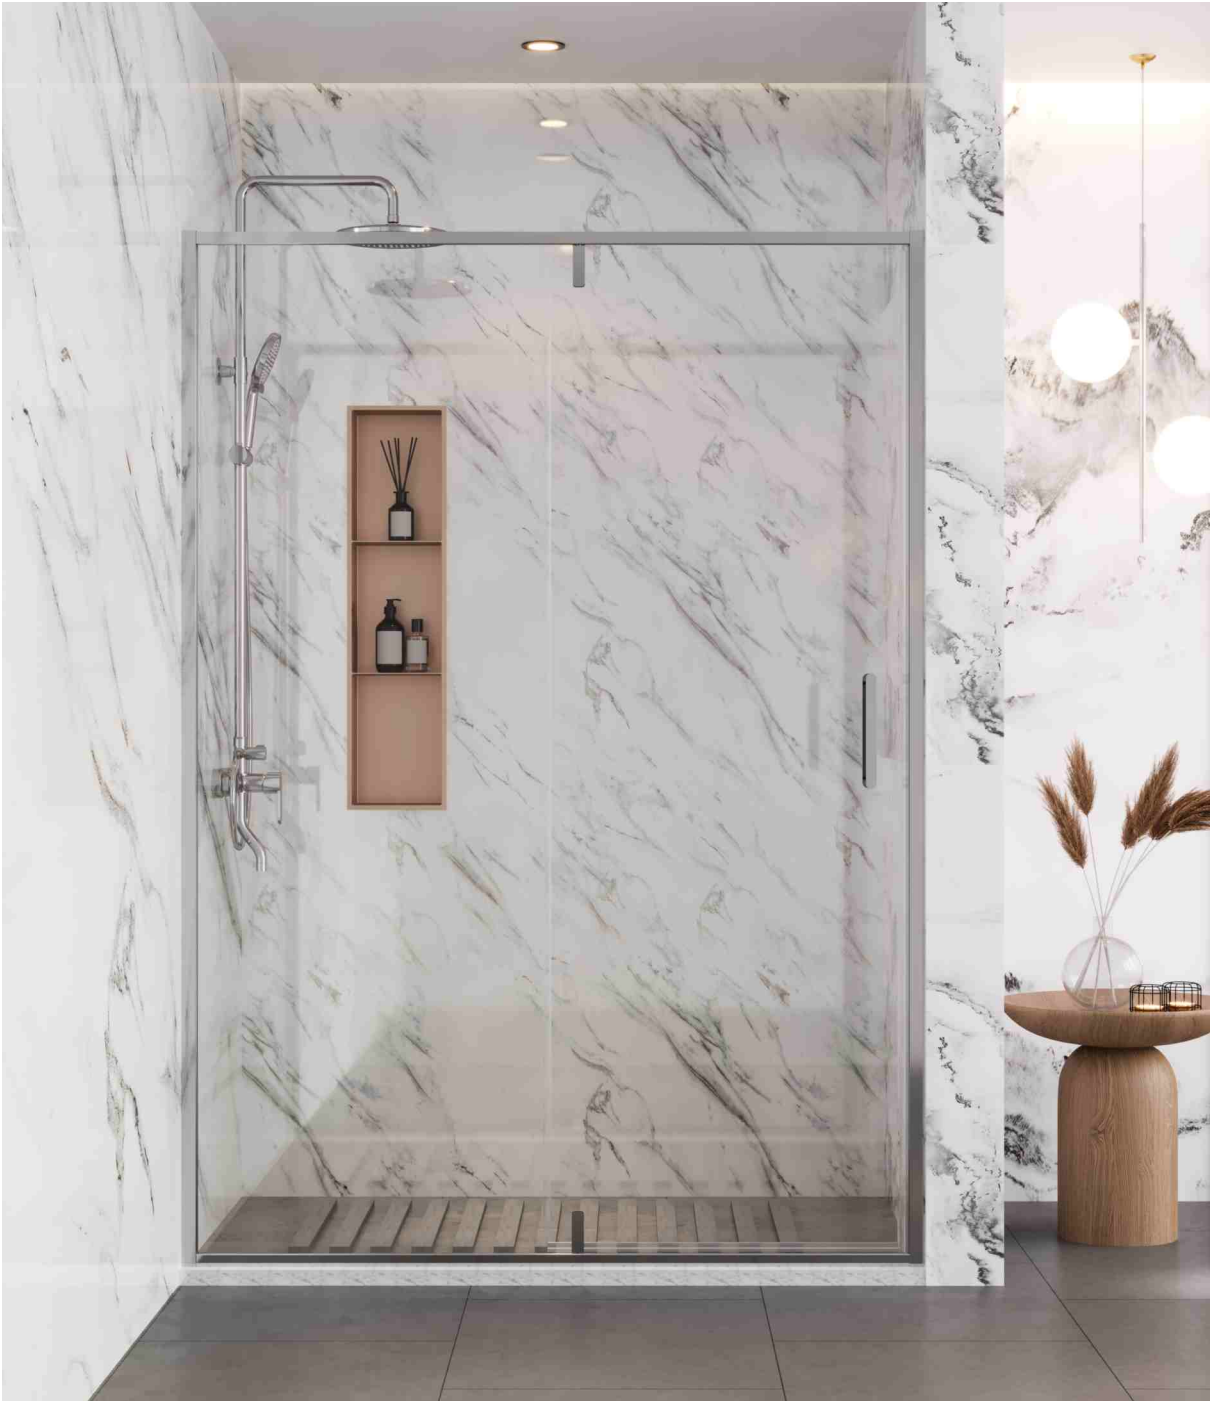

90° positioning pivot design.


AY8-P721

Width B	Product code	Adjustment min-max B	Door opening C
900	AY8-P721-A	880-900	450
1000	AY8-P721-B	980-1000	450
1100	AY8-P721-C	1080-1100	450
1200	AY8-P721-D	1180-1200	500
1400	AY8-P721-E	1380-1400	600
1500	AY8-P721-F	1480-1500	650
1600	AY8-P721-G	1580-1600	700
1700	AY8-P721-H	1680-1700	750



AY8-SP



Width B	Product code	Adjustment min-max B
700	AY8-SP-A	680-700
760	AY8-SP-B	740-760
800	AY8-SP-C	780-800
900	AY8-SP-D	880-900
1000	AY8-SP-E	980-1000



**FAST
INSTALLATION**


FRAME MATERIAL: Aluminum

FRAME COLORS

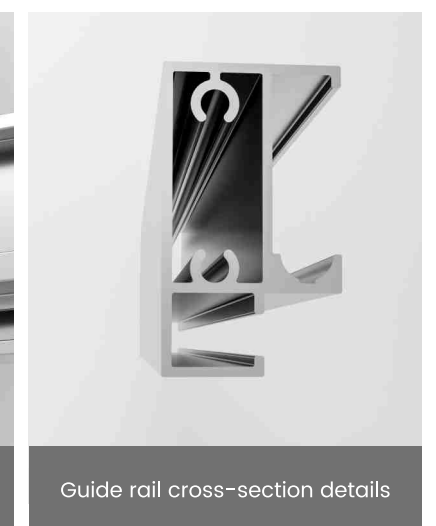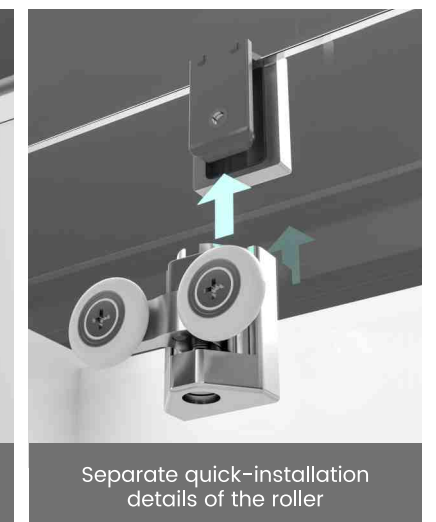

*Other handles are available. For more information, please see page 13.


PATENT CERTIFICATE NUMBER






BQ-P711

Width B	Product code	Adjustment min-max B	Door opening C
760	BQ-P711-A	710-750	502
800	BQ-P711-B	750-790	542
900	BQ-P711-C	850-890	642
1000	BQ-P711-D	950-990	712




BQ-B722

Width B	Product code	Adjustment min-max B	Door opening C
760	BQ-B722-A	710-750	423
800	BQ-B722-B	750-790	463
900	BQ-B722-C	850-890	563
1000	BQ-B722-D	950-990	663






BQ-SP

	Width B	Product code	Adjustment min-max B
	700	BQ-SP-A	670-690
	760	BQ-SP-B	730-750
	800	BQ-SP-C	770-790
	900	BQ-SP-D	870-890
	1000	BQ-SP-E	970-990




BQ-S721

Width B	Product code	Adjustment min-max B	Door opening C
1000	BQ-S721-A	954-990	364
1100	BQ-S721-B	1054-1090	414
1200	BQ-S721-C	1154-1190	464
1400	BQ-S721-D	1354-1390	564
1500	BQ-S721-E	1454-1490	564
1600	BQ-S721-F	1554-1590	564
1700	BQ-S721-G	1654-1690	564



BQ-S142


Width B1/B2	Product code	Adjustment min-max B1/B2	Door opening C
760 / 760	BQ-S142-A	732-750 / 732-750	376
800 / 800	BQ-S142-B	772-790 / 772-790	404
900 / 900	BQ-S142-C	872-890 / 872-890	474






BQ-S431

Width B1/B2	Product code	Adjustment min-max B	Door opening C
760 / 900	BQ-S431-A	732-750 / 872-890	418
800 / 1000	BQ-S431-B	772-790 / 972-990	418
900 / 1200	BQ-S431-C	872-890 / 1172-1190	465



BQ-S442

Width B1/B2	Product code	Adjustment min-max B	Door opening C
800 / 800	BQ-S442-A	772-790 / 772-790	372
900 / 900	BQ-S442-B	872-890 / 872-890	515
1000 / 1000	BQ-S442-C	972-990 / 972-990	515



FAST
INSTALLATION



FRAME MATERIAL: Aluminum

FRAME COLORS

- 

Bright silver
- 

Gold
- 


Flaxen
- 

Matte black
- 


Brushed gold
- 

Brushed nickel
- 

Brushed grey

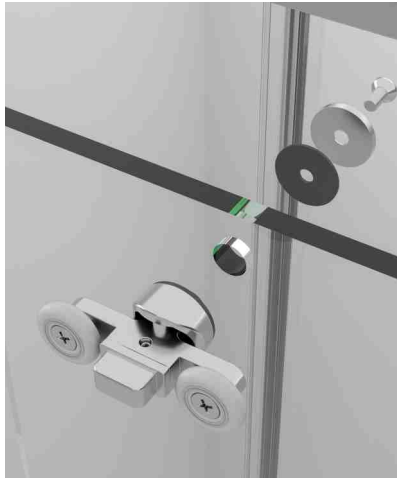

Roller detail image

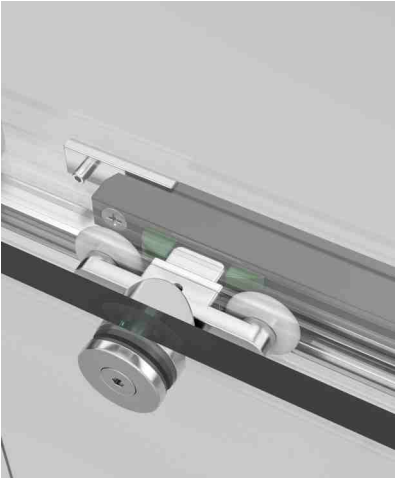

Buffer and roller contact
detail image



Pivot structure

- 

8
mm
GLASS
THICKNESS
- 

HEIGHT
2000MM
- 

15
mm
PRODUCT
ADJUSTMENT
- 

REVERSIBLE FOR
LEFT OR RIGHT
- 

ALL SCREWS
ARE HIDDEN
- 

SOFT CLOSE
- 


FAST
INSTALLATION

*Other handles are available. For more information, please see page 13.




CG-S721

Width B	Product code	Adjustment min-max B	Door opening C
1000	CG-S721-A	975-990	389
1100	CG-S721-B	1075-1190	439
1200	CG-S721-C	1175-1190	489
1400	CG-S721-D	1375-1390	589
1500	CG-S721-E	1475-1490	639
1600	CG-S721-F	1575-1590	639
1700	CG-S721-G	1675-1690	639



CG-SP

Width B	Product code	Adjustment min-max B
700	CG-SP-A	675-690
760	CG-SP-B	735-750
800	CG-SP-C	775-790
900	CG-SP-D	875-890
1000	CG-SP-E	975-990



**FAST
INSTALLATION**



FRAME MATERIAL: SUS304 Top bar, Aluminium wall profile

FRAME COLORS

- 

Bright silver
- 

Gold
- 

Flaxen
- 




Matte black
- 

White
- 

Brushed gold
- 

Brushed nickel
- 

Brushed grey

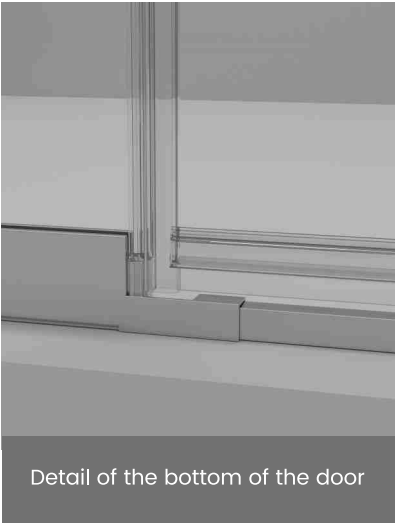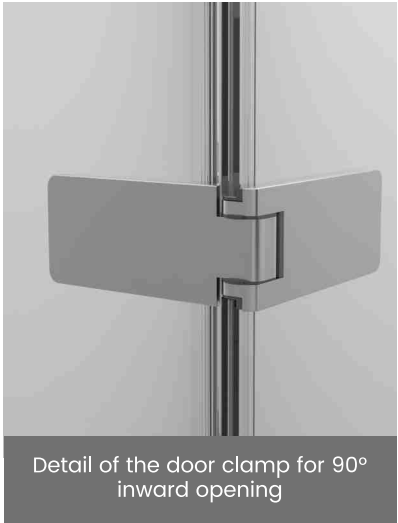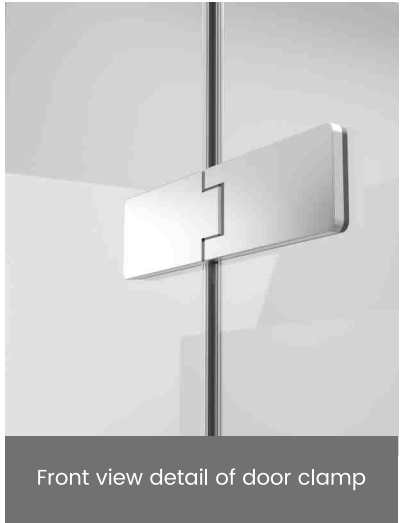

- 

GLASS THICKNESS
- 

HEIGHT 2000MM
- 

PRODUCT ADJUSTMENT
- 

REVERSIBLE FOR LEFT OR RIGHT
- 

ALL SCREWS ARE HIDDEN
- 


FAST INSTALLATION

*Other handles are available. For more information, please see page 13.




CI-P721

Width B	Product code	Adjustment min-max B	Door opening C
1000	CI-P721-A	975-990	595
1100	CI-P721-B	1075-1090	595
1200	CI-P721-C	1175-1190	595
1400	CI-P721-D	1375-1390	595
1500	CI-P721-E	1475-1490	595
1600	CI-P721-F	1575-1590	595
1700	CI-P721-G	1675-1690	595



CI-SP

Width B	Product code	Adjustment min-max B
700	CI-SP-A	675-690
760	CI-SP-B	735-750
800	CI-SP-C	775-790
900	CI-SP-D	875-890
1000	CI-SP-E	975-990



FAST
INSTALLATION



FRAME MATERIAL: Stainless steel

FRAME COLORS



Chrome



Gold



Flaxen



Matte black



Brushed gold



Brushed nickel



Brushed grey



S721 roller with anti-derailment
detail image



S131 corner joint detail image



Cushioning structure detail image



Pivot detail image



S431 wall profile and
rail joint detail image



P121 wall profile and
rail joint detail image



GLASS
THICKNESS



HEIGHT
2000MM



PRODUCT
ADJUSTMENT



REVERSIBLE FOR
LEFT OR RIGHT



ALL SCREWS
ARE HIDDEN



SOFT CLOSE




FAST
INSTALLATION

*Other handles are available. For more information, please see page 13.




CQ-S721

Width B	Product code	Adjustment min-max B	Door opening C
1100	CQ-S721-A	1050-1090	406
1200	CQ-S721-B	1150-1190	456
1400	CQ-S721-C	1350-1390	556
1500	CQ-S721-D	1450-1490	606
1600	CQ-S721-E	1550-1590	606
1700	CQ-S721-F	1650-1690	606



CQ-SP


Width B	Product code	Adjustment min-max B
700	CQ-SP-A	670-690
760	CQ-SP-B	730-750
800	CQ-SP-C	770-790
900	CQ-SP-D	870-890
1000	CQ-SP-E	970-990






CQ-P711-Z

Width B	Product code	Adjustment min-max B	Door opening C
700	CQ-P711-Z-A	650-690	475
760	CQ-P711-Z-B	710-750	515
800	CQ-P711-Z-C	750-790	575
900	CQ-P711-Z-D	850-890	675



CQ-P711-H


Width B	Product code	Adjustment min-max B	Door opening C
700	CQ-P711-H-A	650-690	550
760	CQ-P711-H-B	710-750	610
800	CQ-P711-H-C	750-790	650
900	CQ-P711-H-D	850-890	750






CQ-SP

Width B	Product code	Adjustment min-max B
700	CQ-SP-A	670-690
760	CQ-SP-B	730-750
800	CQ-SP-C	770-790
900	CQ-SP-D	870-890
1000	CQ-SP-E	970-990



CQ-S431

Width B1/B2	Product code	Adjustment min-max B	Door opening C
760 / 900	CQ-S431-A	730-750 / 870-890	410
800 / 800	CQ-S431-B	770-790 / 770-790	410
900 / 900	CQ-S431-C	870-890 / 870-890	460
1000 / 1000	CQ-S431-D	970-990 / 970-990	460
800 / 1000	CQ-S431-E	770-790 / 970-990	410
800 / 1200	CQ-S431-F	770-790 / 1170-1190	410
900 / 1200	CQ-S431-G	870-890 / 1170-1190	460





FRAME MATERIAL: SUS304 Top bar, Aluminium wall profile

FRAME COLORS



Chrome



Gold



Flaxen



Matte black



Brushed gold



Brushed nickel



Brushed grey



Front detail of the door clamp



Detail of the door clamp for 90° outward opening




Detail of the door clamp for 90° inward opening



Detail of the door clamp for 90° inward opening



Detail of the bottom of the door

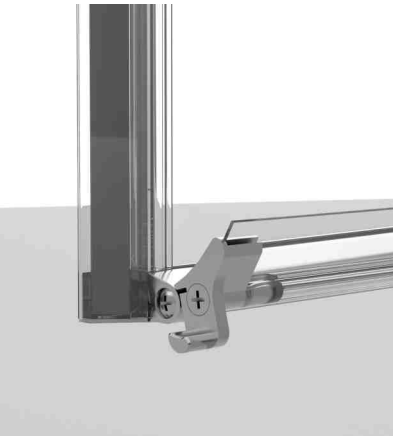

Optional automatic lift and drainage system at the bottom of the door



GLASS THICKNESS



HEIGHT 2000MM



PRODUCT ADJUSTMENT



REVERSIBLE FOR LEFT OR RIGHT




ALL SCREWS ARE HIDDEN

*Other handles are available. For more information, please see page 13.




CU-P721


Width B	Product code	Adjustment min-max B	Door opening C
1000	CU-P721-B	975-990	595
1100	CU-P721-C	1075-1090	595
1200	CU-P721-D	1175-1190	595
1400	CU-P721-E	1375-1390	595
1500	CU-P721-F	1475-1490	595
1600	CU-P721-G	1575-1590	595
1700	CU-P721-H	1675-1690	595



CU-SP

Width B	Product code	Adjustment min-max B
700	CU-SP-A	675-690
760	CU-SP-B	735-750
800	CU-SP-C	775-790
900	CU-SP-D	875-890
1000	CU-SP-E	975-990



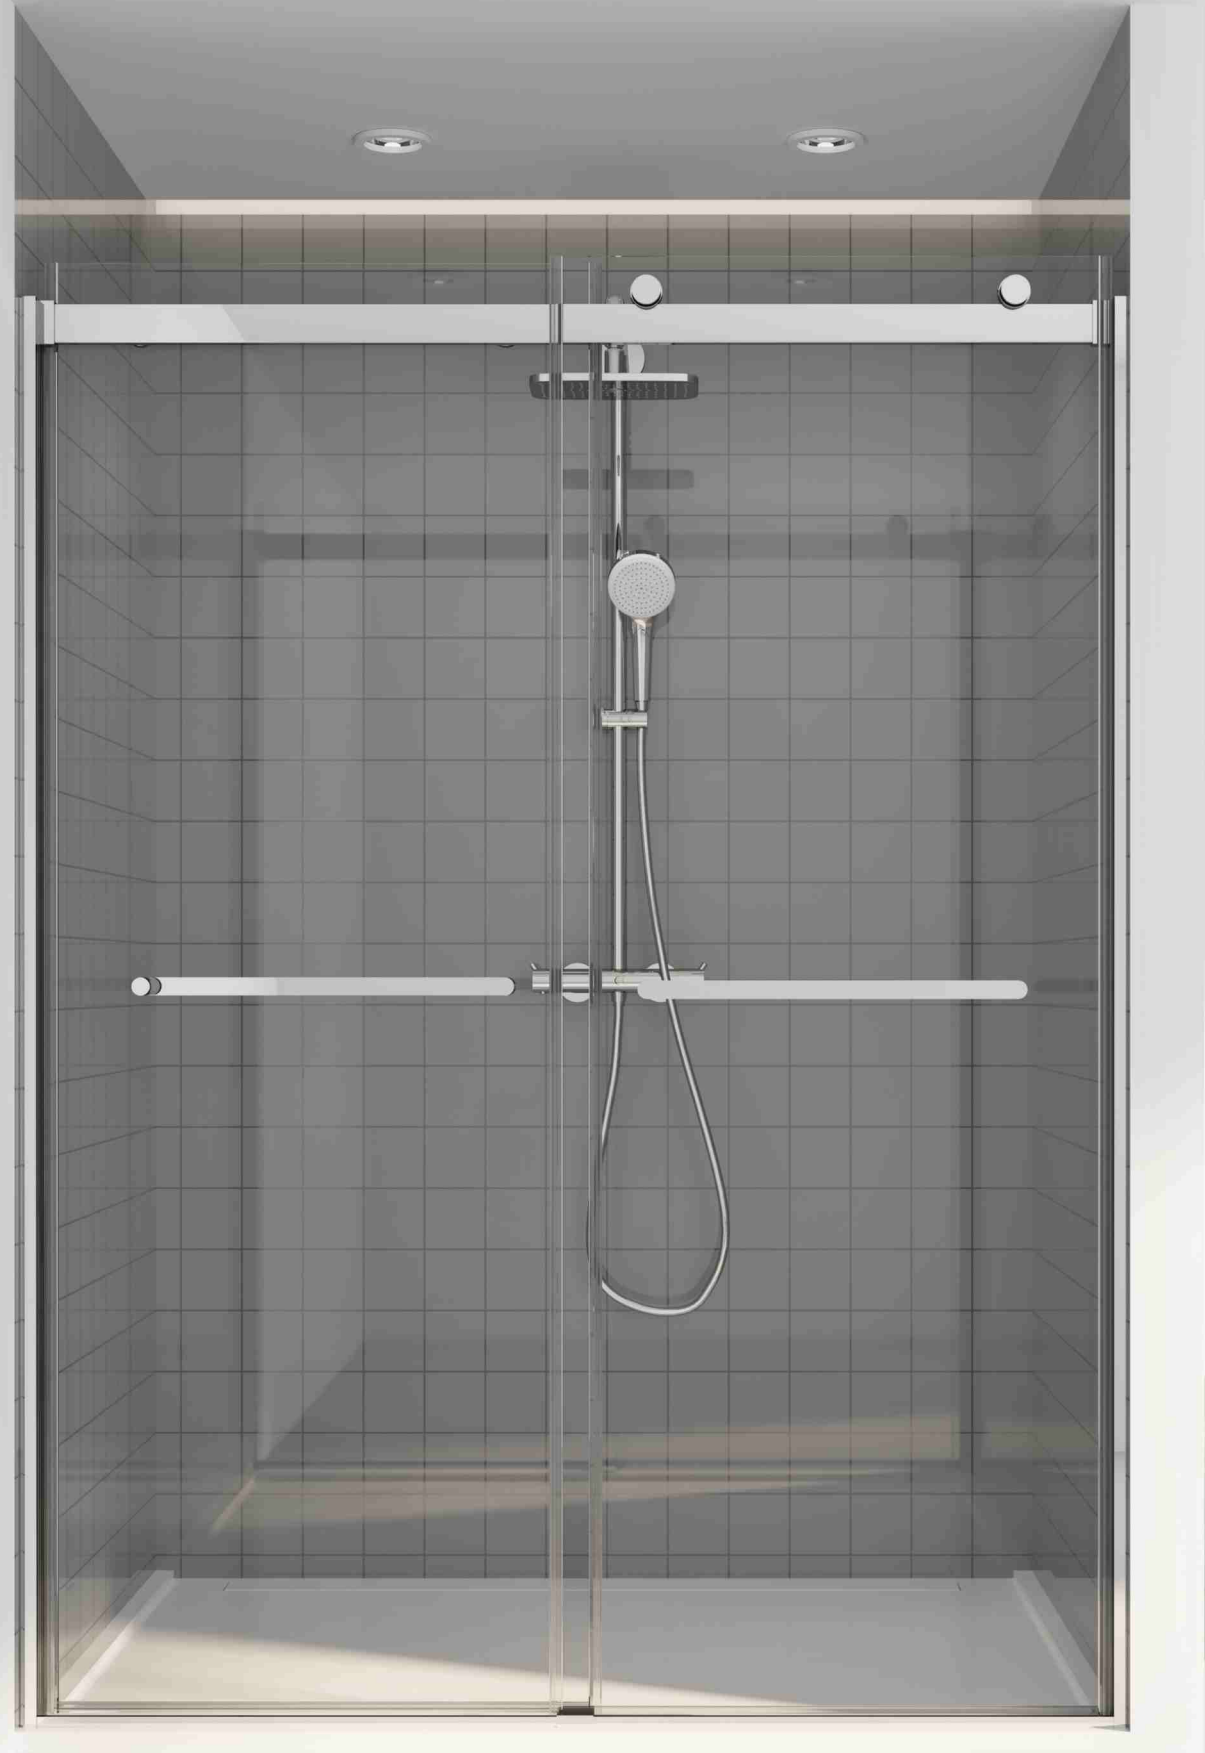

FRAME MATERIAL: Aluminum

FRAME COLORS



Chrome



Gold



Flaxen



Matte black




Brushed gold





Brushed nickel



Brushed grey

CV-S722	Width B	Product code	Adjustment min-max B	Door opening C
	48"(1219mm)	CV-S722-A	1143-1219	489-565
	60"(1524mm)	CV-S722-B	1448-1524	639-715

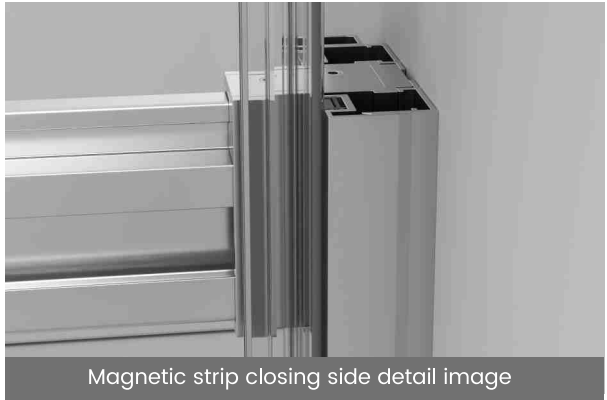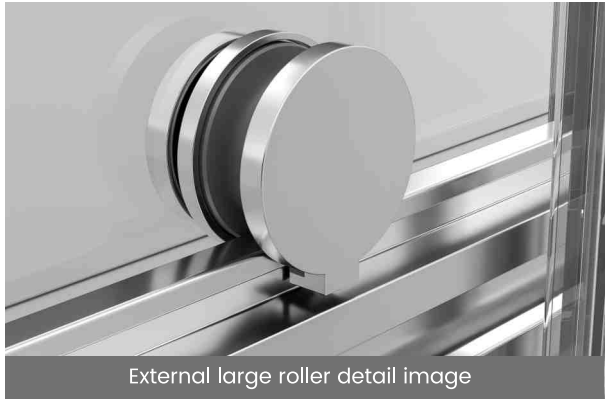



GLASS THICKNESS



HEIGHT 2000MM



PRODUCT ADJUSTMENT



REVERSIBLE FOR LEFT OR RIGHT




ALL SCREWS ARE HIDDEN



***Optional configurations:**
Frameless (wall profile-free) design. Clamp closure mechanism.
***Other handles are available. For more information, please see page 13.**

FRAME MATERIAL: Aluminum or Stainless steel frame

FRAME COLORS



DC-S722	Width B	Product code	Adjustment min-max B	Door opening C
	48"(1219mm)	DC-S722-A	1143-1219	489-565
	60"(1524mm)	DC-S722-B	1448-1524	639-715

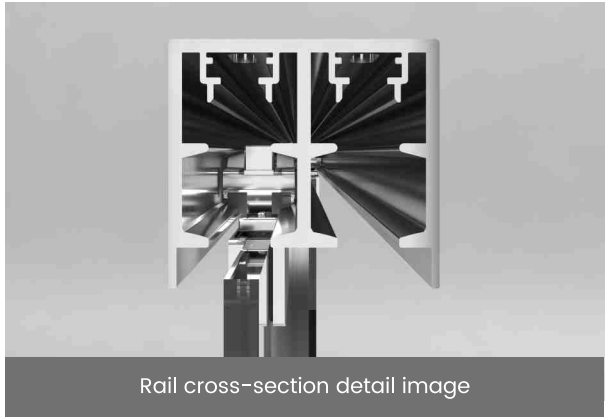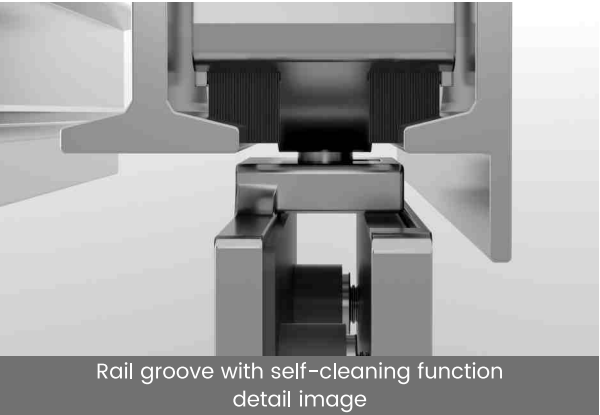

*Other handles are available. For more information, please see page 13.

FRAME MATERIAL: Aluminum

FRAME COLORS















Bright silver

Gold


Flaxen

Matte black

Brushed gold


Brushed nickel

Brushed grey

DE-S722	Width B	Product code	Adjustment min-max B	Door opening C
	48"(1219mm)	DE-S722-A	1143-1219	489-565
	60"(1524mm)	DE-S722-B	1448-1524	639-715




Close-door clamp detail image

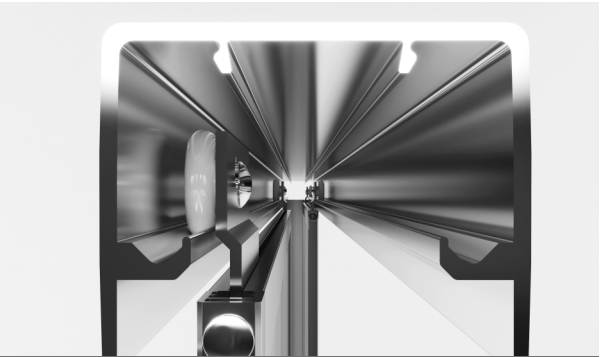

Upper rail cross-section detail image



Bottom guide block detail image

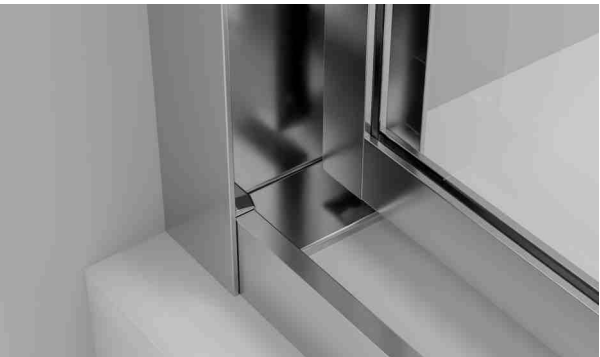

Plastic cover design detail at the bottom rail and vertical material connection



6
mm

GLASS
THICKNESS



HEIGHT
2000MM



76
mm

PRODUCT
ADJUSTMENT



REVERSIBLE FOR
LEFT OR RIGHT





ALL SCREWS
ARE HIDDEN



GLASS FRAME
DESIGN

*Other handles are available. For more information, please see page 13.

PATENT CERTIFICATE NUMBER

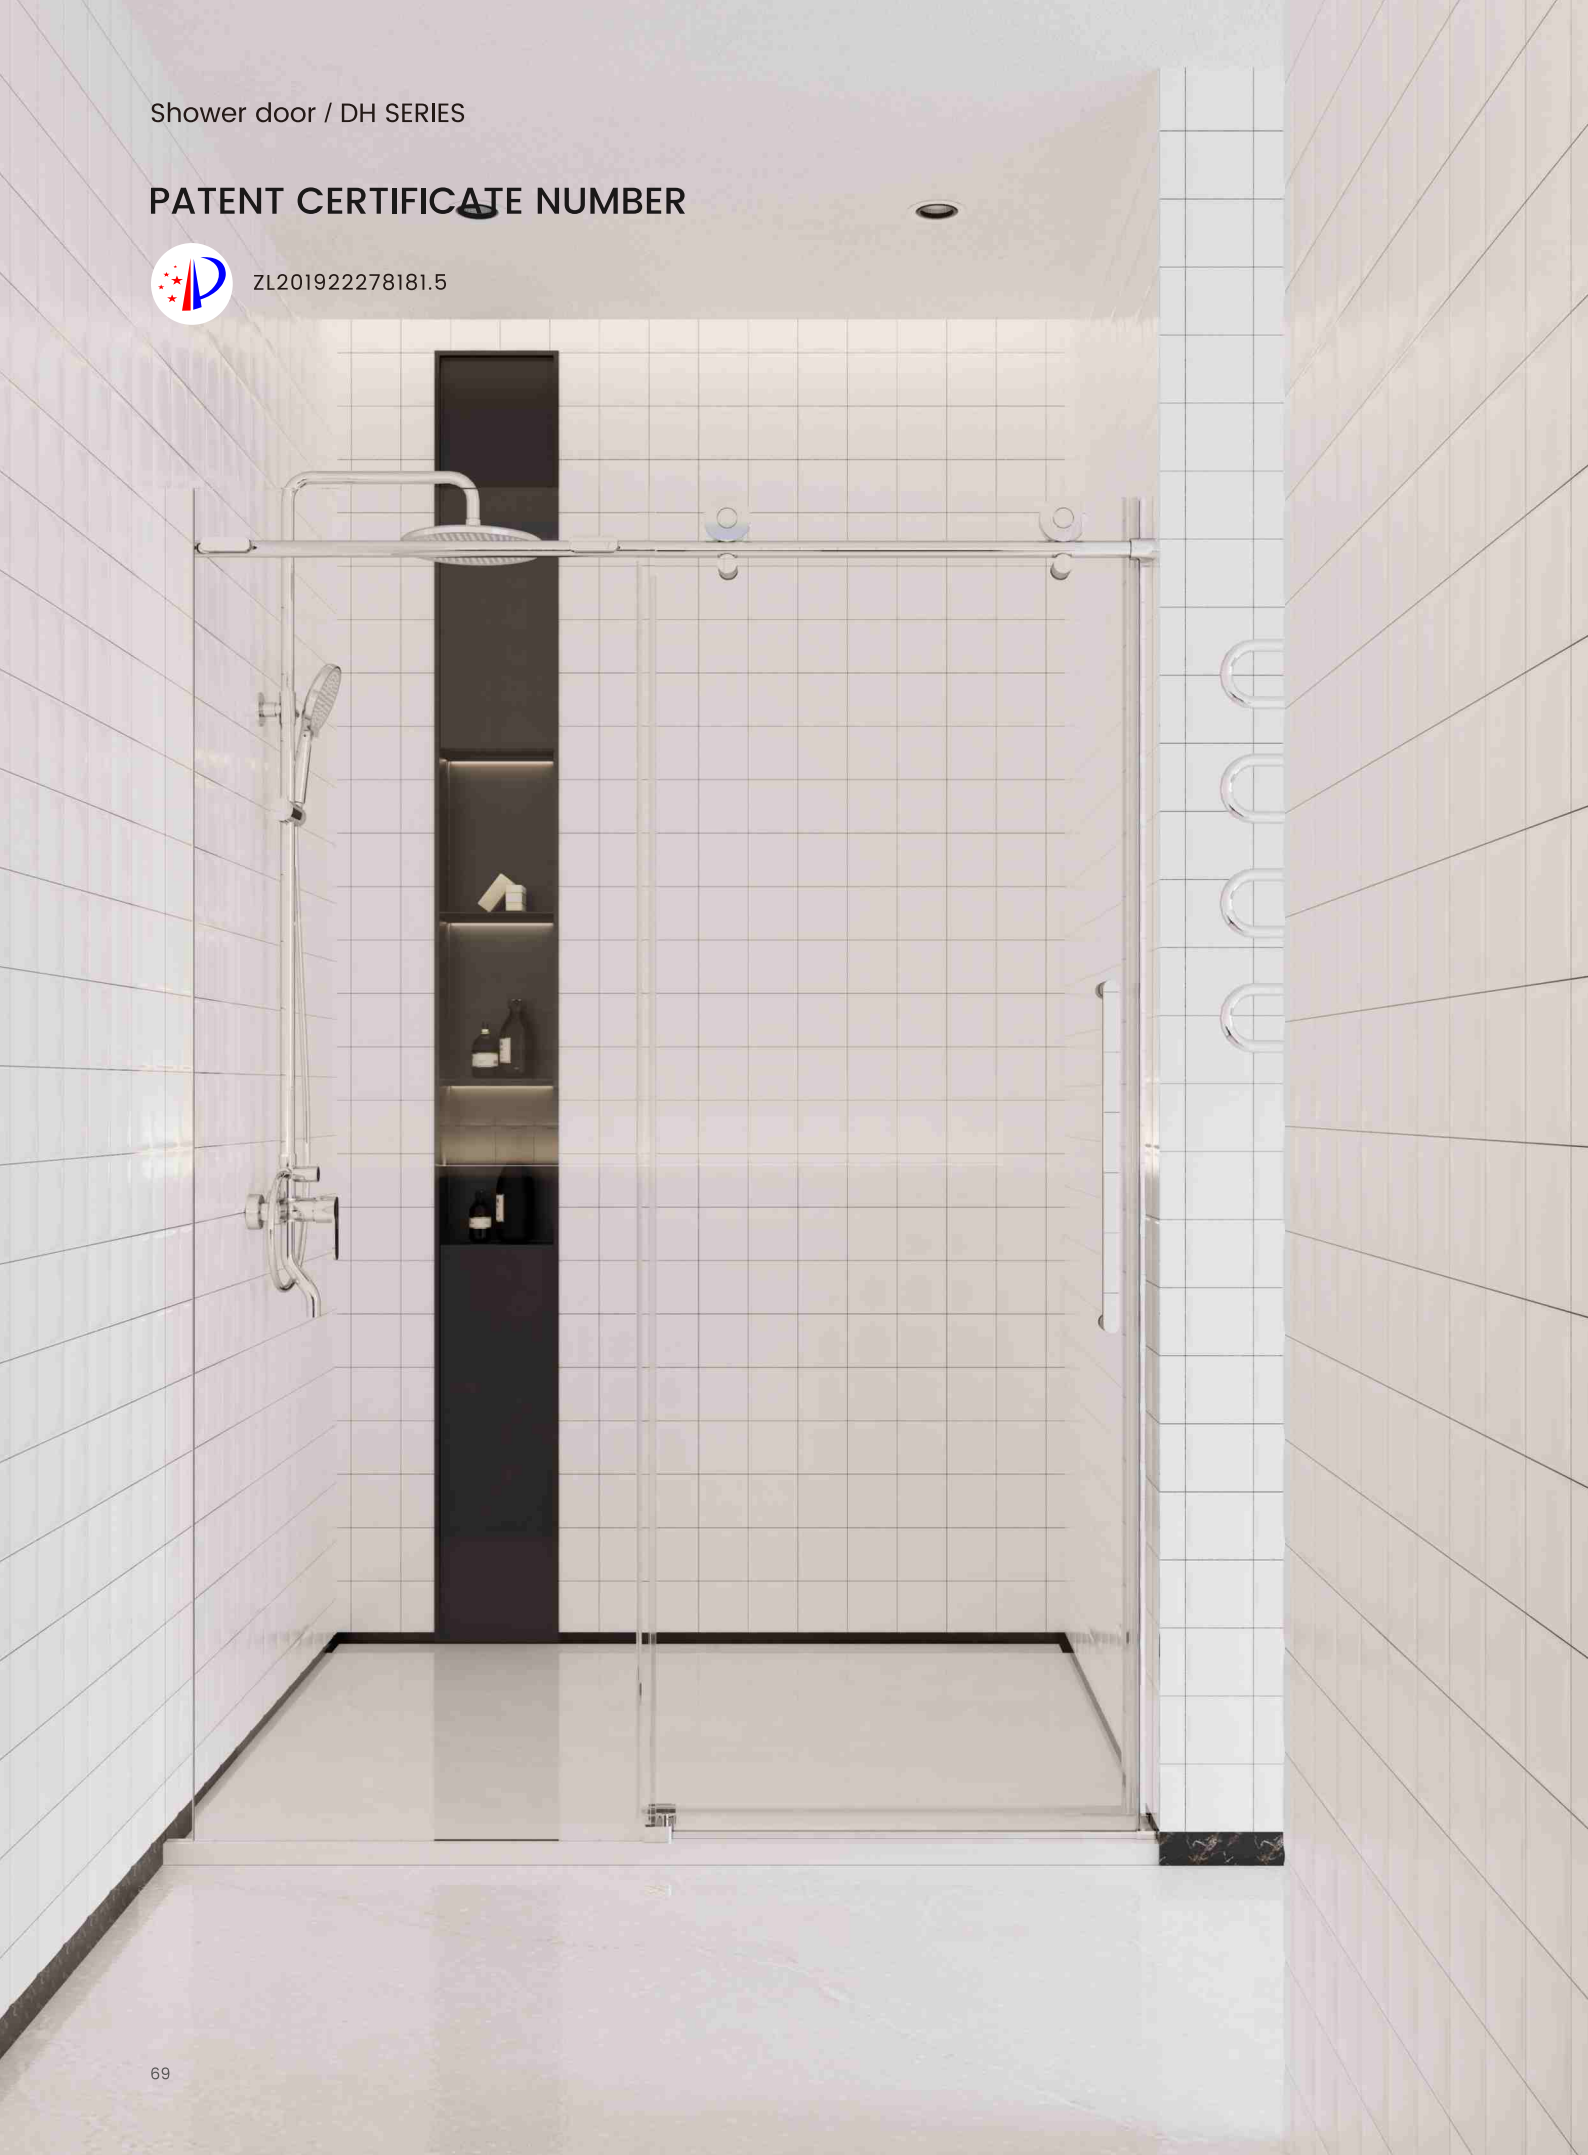



FRAME MATERIAL: Aluminum

FRAME COLORS



DH-S721	Width B	Product code	Adjustment min-max B	Door opening C
	1000	DH-S721-A	940-1000	350-410
	1100	DH-S721-B	1040-1100	400-460
	1200	DH-S721-C	1140-1200	450-510
	1400	DH-S721-D	1340-1400	500-560
	1500	DH-S721-E	1440-1500	550-610
	1600	DH-S721-F	1540-1600	600-660
	1700	DH-S721-G	1640-1700	650-710

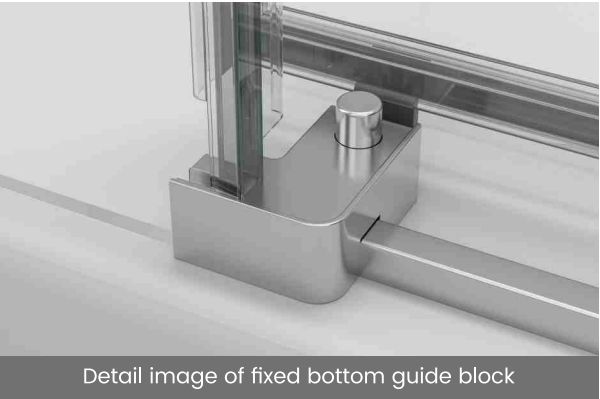

***Optional configurations:**
1. Easy-installation and easy-cleaning structural design.
2. Switch-door buffer structure.

***Other handles are available. For more information, please see page 13.**



FRAME MATERIAL: Stainless steel

FRAME COLORS



Detail images of the front door clamp



The door clamp with self-closing mechanism at 30°



Detail image of the P711 door clamp



Detail image of the support bar glass clamp



GLASS THICKNESS



HEIGHT 2000MM



PRODUCT ADJUSTMENT



REVERSIBLE FOR LEFT OR RIGHT



ALL SCREWS ARE HIDDEN




HYDRAULIC SOFT-CLOSE HINGE DESIGN

*Other handles are available. For more information, please see page 13.




DV-P711

Width B	Product code	Adjustment min-max B	Door opening C
700	DV-P11-A	690-700	605
760	DV-P11-B	750-760	665
800	DV-P11-C	790-800	705
900	DV-P11-D	890-900	805



DV-P721

Width B	Product code	Adjustment min-max B	Door opening C
1000	DV-P721-B	990-1000	715
1100	DV-P721-C	1090-1100	715
1200	DV-P721-D	1190-1200	715
1400	DV-P721-E	1390-1400	715
1500	DV-P721-F	1490-1500	715
1600	DV-P721-G	1590-1600	715
1700	DV-P721-H	1690-1700	715





DV-SP

	Width B	Product code	Adjustment min-max B
	700	DV-SP-A	690-700
	760	DV-SP-B	750-760
	800	DV-SP-C	790-800
	900	DV-SP-D	890-900
	1000	DV-SP-E	990-1000



FRAME MATERIAL: Aluminum

FRAME COLORS


Bright silver


Gold



Flaxen


Matte black


Brushed gold



Brushed nickel


Brushed grey

EG-S331	Width B	Product code	Adjustment min-max B	Door opening C
	1000 * 1000	EG-S331	975-990	520



Closing mechanism detail image

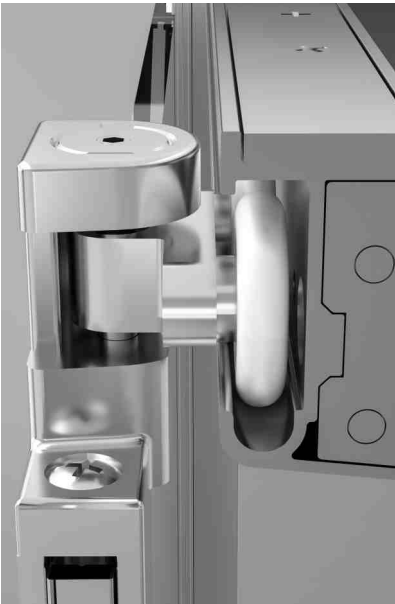

Roller detail image



Adjustment detail image


GLASS THICKNESS


HEIGHT 2000MM


PRODUCT ADJUSTMENT


REVERSIBLE FOR LEFT OR RIGHT



MAGNETIC CLOSURE

*Other handles are available. For more information, please see page 13.




EG-S121

Width B1 / B2	Product code	Adjustment min-max B	Door opening C
760 / 760	EG-S121-A	725-740	520
800 / 800	EG-S121-B	775-790	585
900 / 900	EG-S121-C	875-890	650



EG-S131


Width B	Product code	Adjustment min-max B	Door opening C
800 / 800	EG-S121-A	775-790	575
900 / 900	EG-S121-B	875-890	575
1000 / 1000	EG-S121-C	975-990	575





FRAME MATERIAL: Aluminum
FRAME COLORS

- 
Bright silver
- 
Gold
- 
Flaxen
- 
Matte black
- 
Brushed gold
- 
Brushed nickel
- 
Brushed grey


	EH-YP-S722	Width B	Product code	Adjustment min-max B	Door opening C
		900	EH-YP-S722-A	885-900	835
		1000	EH-YP-S722-B	985-1000	935



Pivot detail image



Sliding roller detail image

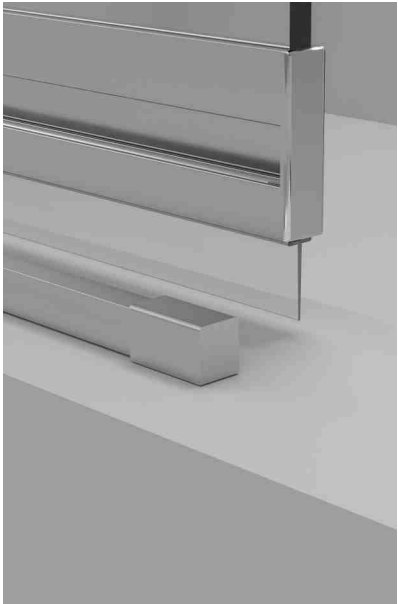

Door bottom water-blocking detail image

- 
GLASS THICKNESS
- 
HEIGHT 1500MM
- 
PRODUCT ADJUSTMENT
- 
REVERSIBLE FOR LEFT OR RIGHT
- 
CONCEALED SLIDING ROLLER DESIGN

*Other handles are available. For more information, please see page 13.



FRAME MATERIAL: Aluminum


FRAME COLORS



PB-S722	Width B	Product code	Adjustment min-max B	Door opening C
	48"(1219mm)	PB-S722-A	1143-1219	489-565
	60"(1524mm)	PB-S722-B	1448-1524	639-715



The close-door clamp

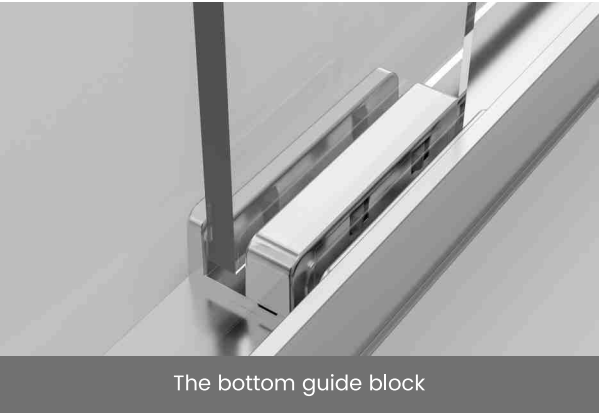

The bottom guide block



The upper rail cross-section



The plastic cover design at the connection between the bottom rail and vertical profile.



*Other handles are available. For more information, please see page 13.




FRAME MATERIAL: Aluminum


FRAME COLORS



PF-S721	Width B	Product code	Adjustment min-max B	Door opening C
	1000	PF-S721-A	970-990	390
	1100	PF-S721-B	1070-1090	440
	1200	PF-S721-C	1170-1190	490
	1400	PF-S721-D	1370-1390	590
	1500	PF-S721-E	1470-1490	590
	1600	PF-S721-F	1570-1590	590
	1700	PF-S721-G	1670-1690	590

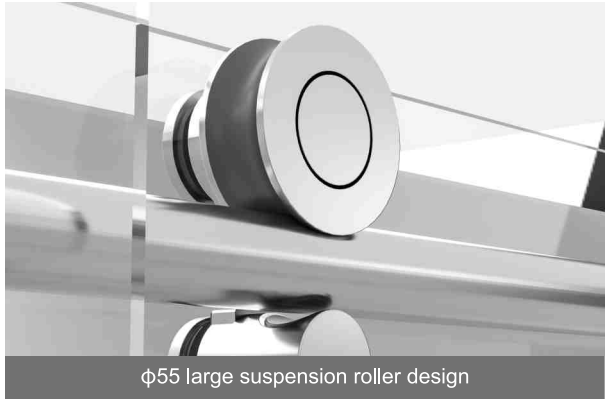


φ55 large suspension roller design

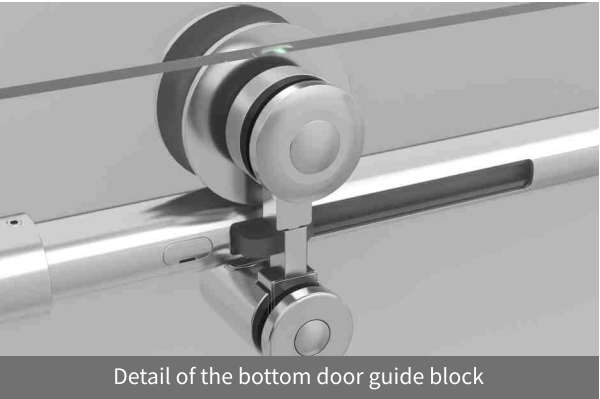

Detail of the bottom door guide block



Detail of 70mm adjustment

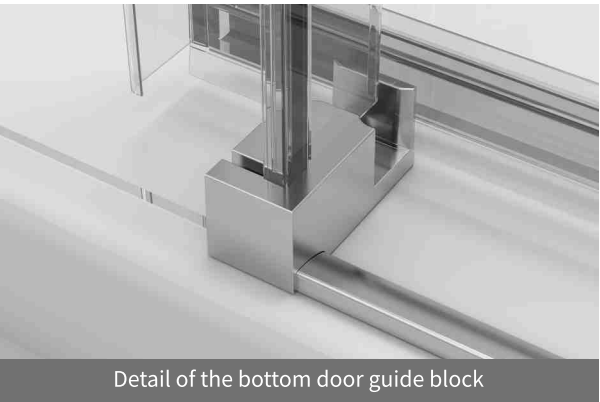

Detail of the bottom door guide block



*Optional configurations:

- ① Easy installation and cleaning structure design.
- ② Switch-door buffer structure.

*Other handles are available. For more information, please see page 13.

PATENT CERTIFICATE NUMBER



ZL202220458704.3

FAST
INSTALLATION

FRAME MATERIAL: Aluminum

FRAME COLORS



Bright silver



Gold



Flaxen



Matte black



Brushed gold




Brushed nickel




Brushed grey



Roller detail image

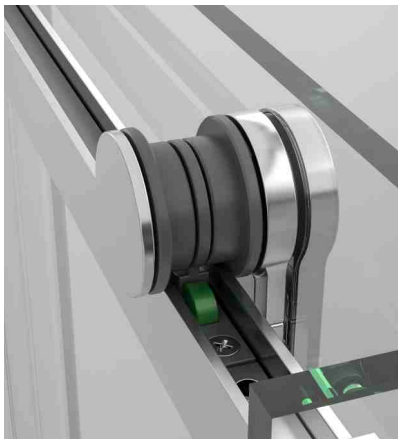

Buffer and roller contact detail image

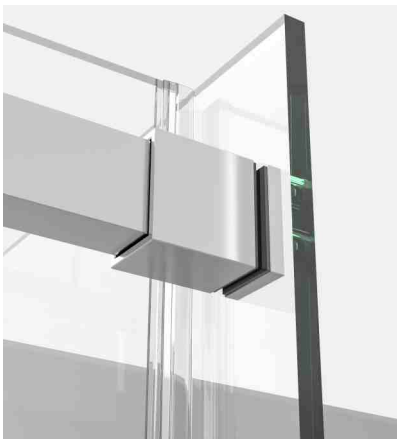

S131 corner connector detail image



GLASS
THICKNESS



HEIGHT
2000MM



PRODUCT
ADJUSTMENT



REVERSIBLE FOR
LEFT OR RIGHT



ALL SCREWS
ARE HIDDEN



SOFT CLOSE




FAST
INSTALLATION

*Other handles are available. For more information, please see page 13.




PH-S721

Width B	Product code	Adjustment min-max B	Door opening C
1100	PH-S721-A	1070-1090	452
1200	PH-S721-B	1170-1190	502
1400	PH-S721-C	1370-1390	602
1500	PH-S721-D	1470-1490	652
1600	PH-S721-E	1570-1590	652
1700	PH-S721-F	1670-1690	652



PH-SP

Width B	Product code	Adjustment min-max B
700	PH-SP-A	675-690
760	PH-SP-B	735-750
800	PH-SP-C	775-790
900	PH-SP-D	875-890
1000	PH-SP-E	975-990



PATENT CERTIFICATE NUMBER



202023105095

202023105097


ZL202321118937.X




FRAME MATERIAL: Aluminum

FRAME COLORS



PN-S722	Width B	Product code	Adjustment min-max B	Door opening C
	48"(1219mm)	PN-S722-A	1143-1219	489-565
	60"(1524mm)	PN-S722-B	1448-1524	639-715

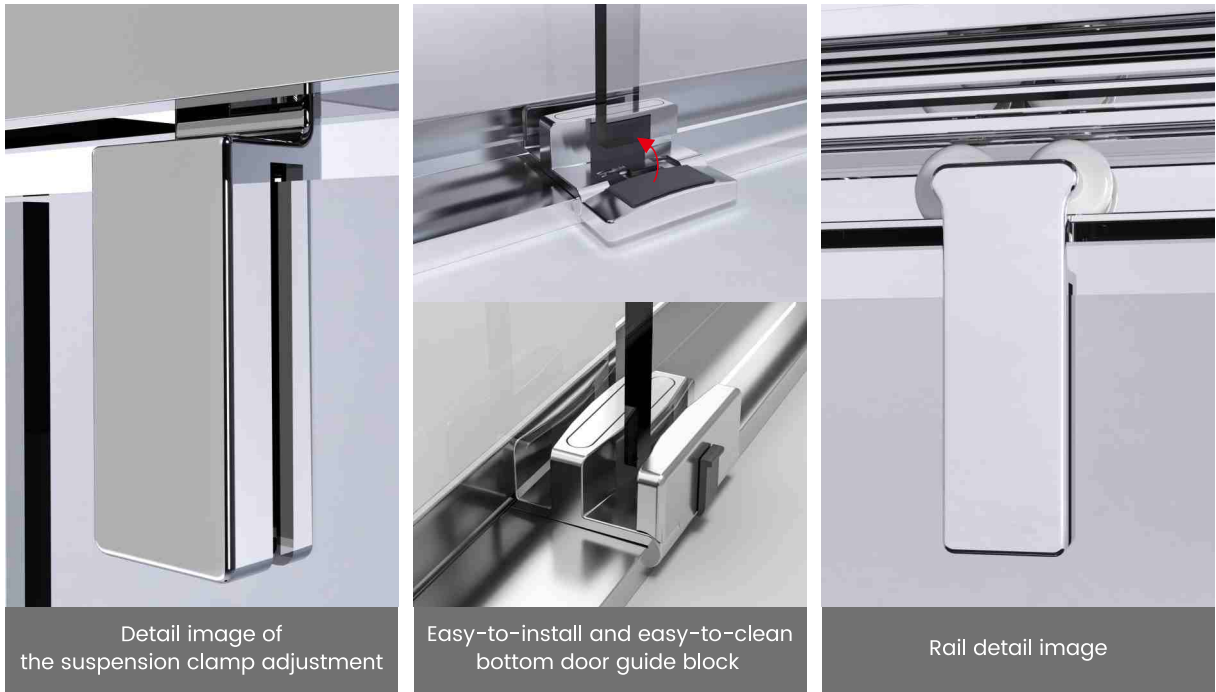

- *Optional configurations:
1. Standard bottom guide block without easy-install and easy-clean features.
 2. Standard eccentric block adjustment for the suspension clamp.

*Other handles are available. For more information, please see page 13.



FRAME MATERIAL: Aluminum

FRAME COLORS



Door clamp details (180°, 90°)



Glass clamp details for support bar



Internal flat structure of door clamp




Optional automatic lift and drainage system for door bottom



*Optional configurations:


1. Inward and outward opening design with internal flat structure.
2. Automatic lift and drainage system for the door bottom.
3. Support bar options (diagonal support bar, straight support bar).

*Other handles are available. For more information, please see page 13.

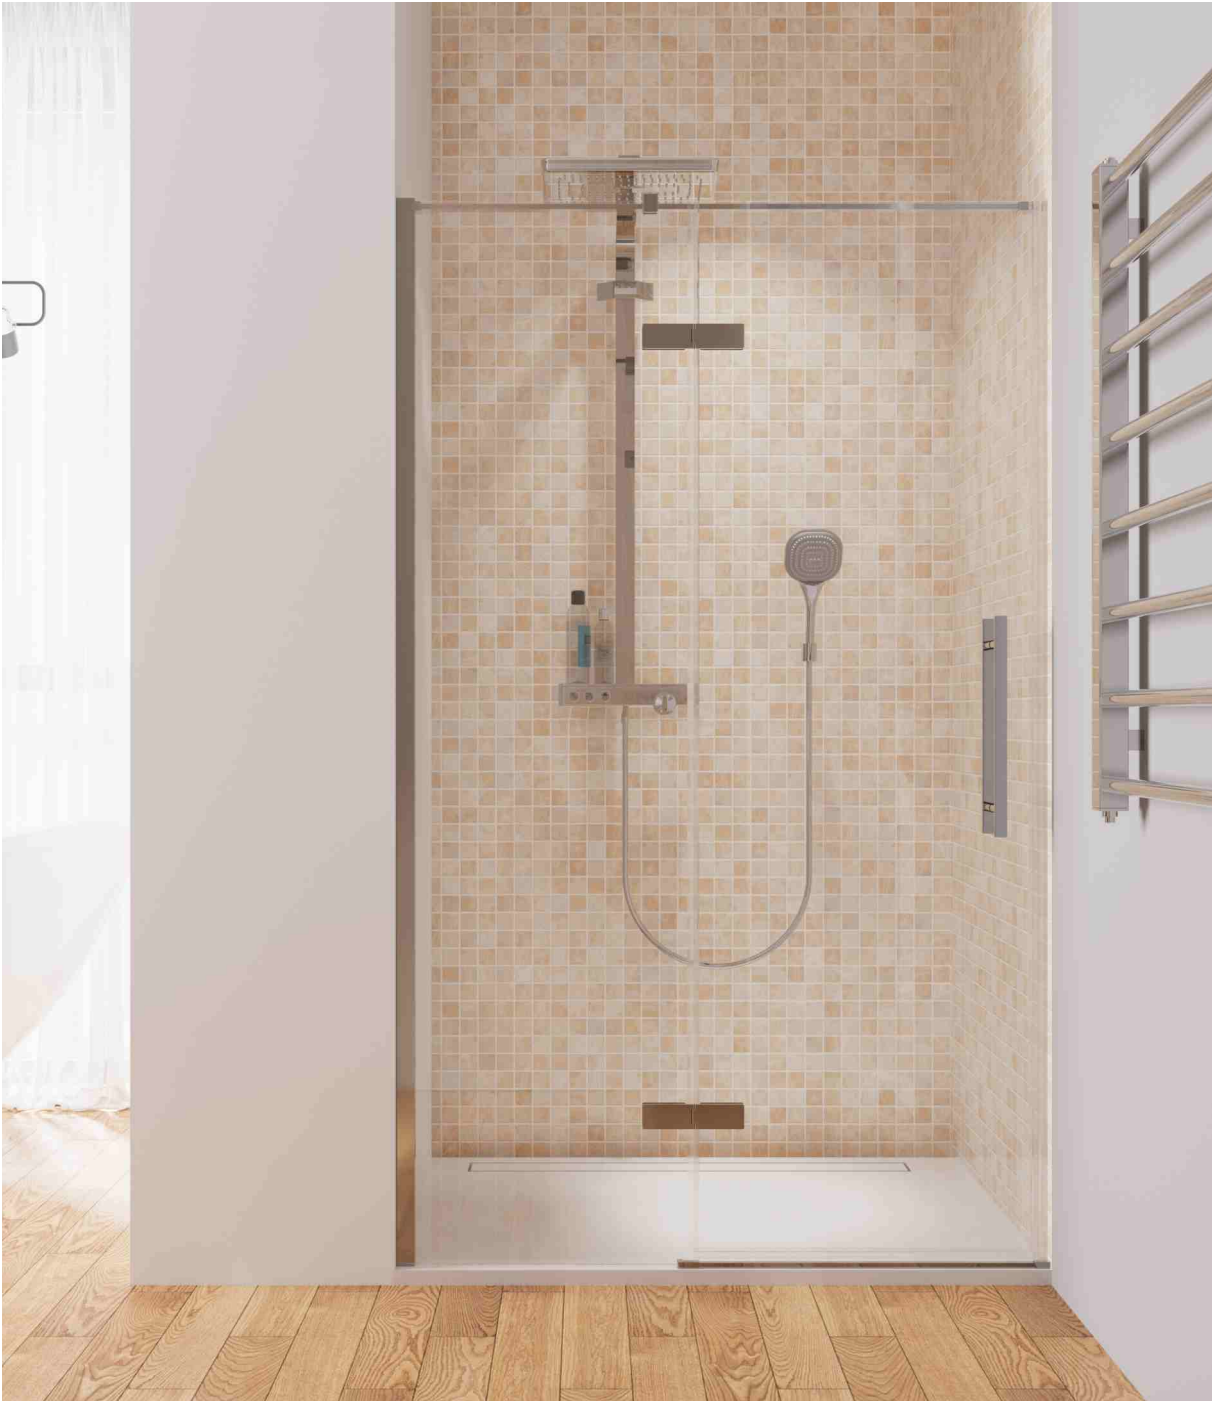


VX-P711

Width B	Product code	Adjustment min-max B	Door opening C
700	VX-P711-A	685-700	605
760	VX-P711-B	745-760	665
800	VX-P711-C	785-800	705
900	VX-P711-D	885-900	805



VX-P721

Width B	Product code	Adjustment min-max B	Door opening C
900	VX-P721-A	885-900	615
1000	VX-P721-B	985-1000	615
1100	VX-P721-C	1085-1100	615
1200	VX-P721-D	1185-1200	615
1400	VX-P721-E	1385-1400	615





VX-SP

Width B	Product code	Adjustment min-max B
700	VX-SP-A	670-690
760	VX-SP-B	730-750
800	VX-SP-C	770-790
900	VX-SP-D	870-890

